



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: G11B 20/14, 27/30	AI	(11) International Publication Number: WO 96/31880
		(43) International Publication Date: 10 October 1996 (10.10.96)

(21) International Application Number: PCT/JP96/00878
(22) International Filing Date: 1 April 1996 (01.04.96)

(30) Priority Data:
7/78986 4 April 1995 (04.04.95) JP

(71) Applicants: MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571 (JP). KABUSHIKI KAISHA TOSHIBA [JP/JP]; 72, Horikawa-cho, Saiwai-ku, Kawasaki-shi, Kanagawa 210 (JP).

(72) Inventors: TANAKA, Shin-ichi; 10-1-C-403, Fukakusa Hama-cho, Fushimi-ku, Kyoto-shi, Kyoto 612 (JP). SHIMADA, Toshiyuki; 11-11, Kanokodai Kitamachi 4-chome, Kita-ku, Kobe-shi, Hyogo 651-15 (JP). KOJIMA, Tadashi; 77-19, Tomiokanishi 4-chome, Kanazawa-ku, Yokohama-shi, Kanagawa 236 (JP). HIRAYAMA, Koichi; 7-10, Gomisawa 1-chome, Totsuka-ku, Yokohama-shi, Kanagawa 245 (JP).

(74) Agents: AOYAMA, Tamotsu et al.; Aoyama & Partners, IMP Building, 3-7, Shiromi 1-chome, Chuo-ku, Osaka-shi, Osaka 540 (JP).

(81) Designated States: CA, CN, JP, KR, MX, SG, VN, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

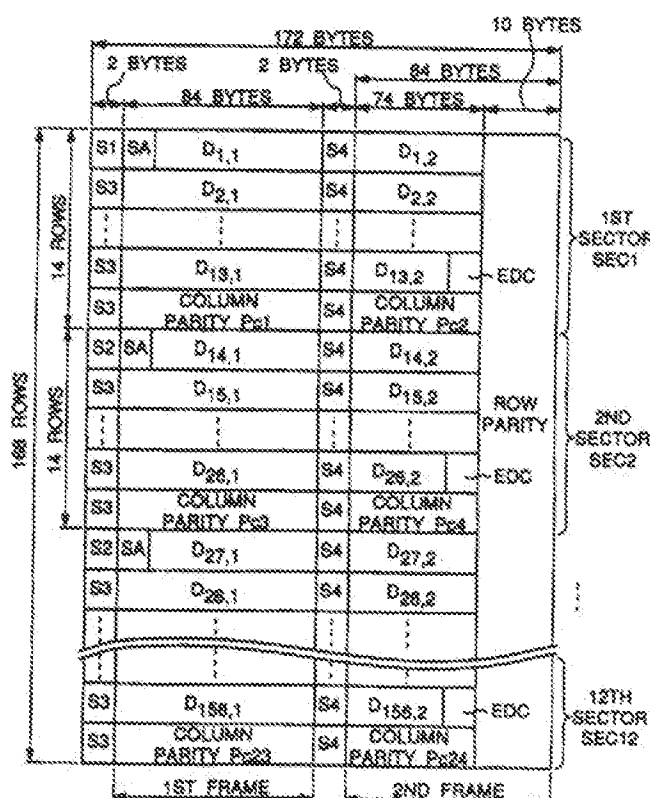
With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: RECORDING MEDIUM, RECORDING METHOD AND APPARATUS, AND REPRODUCTION METHOD AND APPARATUS

(57) Abstract

A digital video disk stores data codes and multifunctional synchronization codes in a data structure. The synchronization codes contain type information code identifying whether the synchronization code is located in a code sequence at the beginning of the data block, the beginning of a data block sector other than the first sector in the data block, the beginning of a line, or the middle of a line. The type information is expressed by two alternative patterns, type information code (1) and type information code (2), expressing the same information and differing in the number of 1s in the 5-bit sequence, i.e., an odd or even number of 1s. Which one of the two type information code pattern is used is selected according to the DSV so as to minimize bias in the dc component of the frame following the synchronization code.



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroun	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SS	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

- 1 -

DESCRIPTION

RECORDING MEDIUM, RECORDING METHOD AND APPARATUS, AND
REPRODUCTION METHOD AND APPARATUS

Technical Field

5 The present invention relates to a recording medium for recording data to which a synchronization code containing various control information is inserted, and to a recording method and apparatus, and a reproducing method and apparatus therefor.

10 Background Art

 Data recorded to a magnetic disk, optical disk, or other such recording medium is conventionally recorded with parity bits or other redundant bits added to enable correction of reading errors occurring in the data during reproduction.

15 While this enables error correction processing to be applied to the reproduced data, demand has grown in recent years for more robust error correction capabilities. One method of improving the error correction capability is to increase the number of redundant bits added to the data. Increasing the

20 number of redundant bits is not particularly desirable, however, because of the reduced recording density this implies. One method of improving the error correction capability without also increasing the size of the error correction code is to increase the size of the data unit to

- 2 -

which error correction processing is applied. For example, one data block may comprise plural sectors, and the data block is used as the error correction processing unit.

Fig. 18 is used to describe the data format of the data block conventionally used as the processing unit for error correction processing.

Each data block comprises 32 sectors, an attribute line, and a parity block. Each sector comprises four lines; to each sector line are written 129 code words identified as $D(i,0) \sim D(i,128)$, each code word equivalent to one byte of data, and sixteen parity code words $P(i,0) \sim P(i,15)$ corresponding to the data bytes. Note that "i" represents the line number in the data block. Lines 0 ~ 3 are assigned to sector 1, lines 4 ~ 7 to sector 2, ... and lines 124 ~ 127 to sector 32. Each sector thus has a 516 byte capacity, including 512 bytes of user data and 4 bytes of CRC code data.

Line 128 is the attribute line to which the block attributes and the attributes of each sector in the block are recorded by data bytes $D(128,0) \sim D(128,128)$. Parity words $P(128,0) \sim P(128,15)$ for data bytes $D(128,0) \sim D(128,128)$ are also recorded to line 128.

As a result, 129 code words of data $D(0,j) \sim D(128,j)$ (where $0 \leq j \leq 128$), and 129 code words of parity data $P(0,k) \sim P(128,k)$ (where $0 \leq k \leq 15$), are thus written columnwise to the data block.

Sixteen code words of parity data $Q(0,j) \sim Q(15,j)$ for the columnwise data words $D(0,j) \sim D(128,j)$, and 16 code

- 3 -

words of parity data $Q(0,m) - Q(15,m)$ (where $129 \leq m \leq 144$) for the columnwise parity words $P(0,k) - P(128,k)$, are written to the parity block.

5 An address is assigned to each data block containing the code words and parity words arrayed as described above, and is written to a particular location on the recording medium.

10 However, because the address is only written to the beginning of the data blocks thus formatted, and an address is not added to each sector, access and search times both increase as the block size increases.

15 More specifically, if data reading starts from some midpoint in a block, it is not possible to determine where in what block data reading started. It is therefore necessary to always start reading from the beginning of the data block, making it necessary to wait until the address at the beginning of the block is recognized when accessing any particular block.

20 Because the address can only be determined when reading starts at the beginning of a block, the average time required for an address to be read increases as the block size increases. This makes searches take longer.

25 While it is possible to add a frame number to each frame as a means of reducing access time, the code word must be lengthened to express all frame numbers, and the recording density of the recording medium drops because these code words must also be added to each frame. In addition, these frame

- 4 -

numbers cannot be used for any other function.

Disclosure of Invention

Therefore, the primary object of the present invention is to provide a recording medium to which information is recorded using a multifunctional synchronization code that enables a data structure achieving a high error correction capability without reducing the recording density.

A further object of the invention is to provide new methods for recording and reproducing the information recorded with said synchronization code.

To achieve the aforementioned objects, an article of manufacture according to the present invention comprises: a reproducer usable recording medium having a reproducer readable code embodied therein, said reproducer readable code in said article of manufacture comprising: synchronization codes provided along a track with an interval between two synchronization codes; and data codes filled in said interval between two synchronization codes, said data codes comprising a sequence of code words; said synchronization code comprising an identifier having a particular pattern distinguishable from any data in said data codes, and a type information code representing a type of synchronization code.

According to the present invention, a recording method for recording a sequence of code words to a recording medium, in which a plurality of code words form a frame, and a plurality of frames form a data block, said method comprises

- 5 -

the steps of:

(a) inserting synchronization codes at a beginning of and at preselected places in said data block;

(b) adding an identifier code to each said synchronization code for discriminating the synchronization code from other codes in the data block;

(c) adding a type information code to each said synchronization code for indicating a type of synchronization code based on the position in the block where the synchronization code is insertion; and

(d) outputting for recording the data blocks to which the synchronization codes have been inserted.

According to the present invention, a recording apparatus for recording a sequence of code words to a recording medium, in which a plurality of code words form a frame, and a plurality of frames form a data block, said apparatus comprises: inserting means for inserting synchronization codes at a beginning of and at preselected places in said data block; first adding means for adding an identifier code to each said synchronization code for discriminating the synchronization code from other codes in the data block; second adding means for adding a type information code to each said synchronization code for indicating a type of synchronization code based on the position in the block where the synchronization code is insertion; and outputting means for outputting the data blocks to which the synchronization codes have been inserted for recording to said recording medium.

- 6 -

According to the present invention, a reproduction method for reproducing information from a recording medium storing synchronization codes provided along a track with an interval between two synchronization codes, and data codes filled in said interval between two synchronization codes, said data codes comprising a sequence of code words; said synchronization code comprising an identifier having a particular pattern distinguishable from any data in said data codes, and a type information code specifying a location of the corresponding synchronization code in a data block, said method comprises the steps of:

- (a) detecting said synchronization code by detecting said identifier; and
- (b) reading said type information code in said synchronization code to specify the location of said synchronization code and eventually specifying the data codes following said synchronization code in the data block.

According to the present invention, a reproduction apparatus for reproducing information from a recording medium storing synchronization codes provided along a track with an interval between two synchronization codes, and data codes filled in said interval between two synchronization codes, said data codes comprising a sequence of code words; said synchronization code comprising an identifier having a particular pattern distinguishable from any data in said data codes, and a type information code specifying a location of the corresponding synchronization code in a data block, said

- 7 -

apparatus comprises: detecting means for detecting said
synchronization code by detecting said identifier; and reading
means for reading said type information code in said synchro-
nization code to specify the location of said synchronization
code and eventually specifying the data codes following said
5 synchronization code in the data block.

The recording medium according to the present
invention records information using a synchronization code
comprising an identifier code used to discriminate the
10 synchronization code from the other information, and a type
information code immediately following the identifier code and
identifying the type of synchronization code.

It is therefore possible by the present invention
to provide a recording medium to which is recorded a code word
15 sequence containing a particular synchronization code whereby
the synchronization codes contained in the data written to the
recording medium can be identified and frame synchronization
can be achieved by detecting the identifier codes identifying
the synchronization codes, and information of which the type
20 is expressed by the synchronization code and which expresses
something other than the synchronization code can be obtained
by reading the type information code following the identifier
code.

The recording medium according to a first aspect of
25 the present invention records a type information code
identifying specifically the address of the synchronization
code in a data block comprising a particular number of frames.

- 8 -

It is therefore possible by this aspect to provide a recording medium to which is recorded a code word sequence containing a particular synchronization code whereby the location of the synchronization code in the data block can be known by reading the type information code.

The recording medium according to a second aspect of the present invention records an identifier code specifically containing a particular pattern that does not exist in the code word sequence, and forms a code word contained in the code word group with the code segment starting from a particular position in this identifier code and the type information code following thereafter.

It is therefore possible by this aspect to provide a recording medium to which is recorded a code word sequence containing a particular synchronization code whereby the synchronization code can be discriminated from the code word sequence of non-synchronization codes by means of the particular pattern of the identifier code, the code word formed containing the type information code can be read as one code word of the code word group, and the location of the synchronization code in the data block expressed by that type information code can be known, without requiring a special data structure for reading the type information code, if the information expressed by the type information code, and the information expressed by the code word formed containing said type information code, are recorded with a particular correspondence therebetween.

- 9 -

The recording medium according to a third aspect of the present invention selects the type information code from plural type information codes expressing the same type information and resulting in the smallest bias in the dc component of the other information within a specific period of the synchronization code.

It is therefore possible by this aspect to provide a recording medium to which is recorded a code word sequence containing a particular synchronization code whereby the location of the synchronization code in the data block can be known by reading the type information code, and which is selected to achieve the least bias in the dc component of the reproduction signal reproduced from the recording medium of the invention.

With the recording medium according to a fourth aspect of the invention, the data blocks are specifically divided into plural sectors of plural frames each, information expressing the sector address is contained in a particular frame in each sector, and a type information code identifying the frame containing the sector address information is contained in the synchronization code inserted before the frame containing the sector address information.

It is therefore possible by this aspect to provide a recording medium to which is recorded a code word sequence containing a particular synchronization code whereby the frame containing the sector address information can be easily determined by reading the type information code of the

- 10 -

synchronization code. It is therefore possible to access a particular block at high speed by simply reading only the type information code of the synchronization code and the address information, and code word sequences containing the
5 synchronization code can be read from some midpoint in the desired block.

In the recording method according to a fifth aspect of the invention, the block start identification step identifies the beginning of a data block comprising plural
10 frames. The synchronization code insertion position identification step identifies the position in said data block to which the synchronization code should be inserted. The identifier code insertion step then inserts an identifier code for discriminating the synchronization code from the other
15 information at the identified synchronization code insertion position. The type determination step determines the type of synchronization code based on the identified synchronization code insertion position. The type information code insertion step inserts immediately after the identifier code the type
20 information code expressing the determined synchronization code type. The recording step then records to a continuous area of the recording medium the data blocks to which the identifier code and type information code have been thus inserted.

25 It is therefore possible by this aspect to provide a recording method for recording to a recording medium a code sequence containing a synchronization code whereby the

- 11 -

identifier code identifies the synchronization code from the code word sequences containing non-synchronization code information, and the type information code indicating the synchronization code type is selected according to the
5 synchronization code insertion position and can also be used to express information other than identifying the synchronization codes.

The recording method according to the sixth aspect of the invention further comprises an identifier code
10 generating step generating, after identifying the synchronization code insertion position, an identifier code containing a particular pattern that does not exist in the code word sequence expressing information other than the synchronization codes; and a type information code generating step generating,
15 after determining the synchronization code type, a type information code whereby one of the code words included in said code word group is formed by the code segment starting from a particular position in the generated identifier code and the type information code expressing the determined
20 synchronization code type. The recording step in this method records the generated type information code.

It is therefore possible by this aspect to provide a recording method for writing to a recording medium a code word sequence containing a particular synchronization code
25 whereby the synchronization code can be discriminated from the code word sequence of non-synchronization codes by means of the particular pattern of the identifier code, the code word

- 12 -

formed containing the type information code can be read as one code word of the code word group, and the location of the synchronization code in the data block expressed by that type information code can be known, without requiring a special data structure for reading the type information code, if the information expressed by the type information code, and the information expressed by the code word formed containing said type information code, are recorded with a particular correspondence therebetween.

10 The recording method according to the seventh aspect of the invention, further comprises a dc component calculation step calculating, after identifying the synchronization code insertion position, the amount of dc component bias in the non-synchronization code information within a known period of the position to which the synchronization code is inserted; and a type information code selection step selecting from among plural type information codes expressing the same type as the determined synchronization code type, the type information code resulting in the least dc component bias.

15 The type information code recording step records the selected type information code.

20 It is therefore possible by this aspect to provide a recording method for writing to a recording medium a code word sequence containing a particular synchronization code whereby the location of the synchronization code in the data block can be known by reading the type information code, and which is selected to achieve the least bias in the dc

25

- 13 -

component of the reproduction signal reproduced from the recording medium of the invention.

The recording method according to the eighth aspect of the invention further comprises an address frame identification step identifying within each data block divided into plural sectors of plural frames each, the frame that contains the sector address information and is located at a particular position in each sector. The type information code insertion step in this method inserts a type information code to the synchronization code before the frame containing the address information and identifying the frame containing the address information immediately following the identifier code.

It is therefore possible by this aspect to provide a recording method for writing to a recording medium a code word sequence containing a particular synchronization code whereby the frame containing the sector address information can be easily determined by reading the type information code of the synchronization code. It is therefore possible to access a particular block at high speed by simply reading only the type information code of the synchronization code and the address information, and code word sequences containing the synchronization code can be read from some midpoint in the desired block.

In the reproduction method according to the ninth aspect of the invention, the synchronization code identification step identifies the synchronization code in the information recorded to the recording medium according to the first

- 14 -

aspect by detecting the identifier code. The code word synchronization step then synchronizes the read clock to a code word based on the identified synchronization code. A type information read step then reads the type information code of the synchronization code based on the read clock
5 synchronized to the code word. A data location determination step then determines the location in the data block of the information recorded immediately following the synchronization code based on the read type information code.

10 It is therefore possible by means of a reproduction method according to the ninth aspect to accurately discriminate the synchronization codes, and synchronize the read clock to the code words, based on a code word sequence containing a particular synchronization code written to a recording
15 medium according to the first aspect. It is also possible to selectively read information recorded immediately following the synchronization code by thus determining the location of information recorded immediately following the synchronization code in the data block.

20 In the reproduction method according to the tenth aspect of the invention, the synchronization code identification step identifies the synchronization codes in the information recorded to the recording medium according to the second aspect by detecting an identifier code containing a
25 particular pattern that does not exist in the code word sequences expressing non-synchronization code information. The code word synchronization step synchronizes the read clock

- 15 -

to the code word based on the identified synchronization code.
The type information read step then reads the type information
code as a code word based on the read clock synchronized to
the code word. The type decoding step then decodes the read
5 type information code as code words to extract the type information; and the data location determination step determines
the location in the data block of the information recorded
immediately following the synchronization code based on the
extracted type information.

10 It is therefore possible by means of a reproduction
method according to the tenth aspect to accurately discriminate the synchronization codes, and synchronize the read clock
to the code words, based on the particular pattern of the
identifier code. It is also possible to selectively read
15 information recorded immediately following the synchronization
code by reading the code word formed containing the type
information code as one code word of the code word group, and
determining the location of information recorded immediately
following the synchronization code in the data block.

20 In the reproduction method according to the eleventh
aspect of the invention, the synchronization code identification step identifies the synchronization code in the recorded
information by detecting an identifier code in the data
recorded to a recording medium according to the fourth aspect.
25 The code word synchronization step synchronizes the read clock
to the code word based on the identified synchronization code.
The type information read step then reads the type information

- 16 -

code of the synchronization code based on the read clock
synchronized to the code word. The data location determina-
tion step determines the location in the data block of the
information recorded immediately following the synchronization
5 code based on the read type information code. The address
recognition step then recognizes the information at a
particular location in the frame determined by the data
location determination step to be the frame containing the
address information as the address information.

10 It is therefore possible by means of the reproduc-
tion method according to the eleventh aspect to easily
determine from the data recorded to a recording medium
according to the fourth aspect the frames containing address
information based on the type information codes of the
15 synchronization codes. It is therefore possible to access a
particular block at high speed by simply reading only the type
information code of the synchronization code and the address
information, and code word sequences containing the synchroni-
zation code can be read from some midpoint in the desired
20 block.

The present application is based upon Japanese
Patent Application Serial No. 7-78,988, which was filed on
April 4, 1995, the entire content of which is expressly incor-
porated by reference herein.

25 Brief Description of Drawings

The present invention will become more fully

- 17 -

understood from the detailed description given below and the accompanying diagrams wherein:

Fig. 1 is a diagram showing the data and synchronization code as the data to be written to a recording medium according to the first embodiment of the invention before modulation for recording;

Fig. 2 is a conversion table showing examples of 8-15 conversion used in the preferred embodiments of the invention;

Fig. 3 is a conversion table showing examples of 8-15 conversion used in the preferred embodiments of the invention;

Fig. 4 is a diagram showing the data structure of the synchronization codes S1-S4 in the preferred embodiments of the invention;

Fig. 5 is a diagram showing the relationship between the reproduction signal reproduced from an optical disk according to the present embodiment, and the NRZI channel signal read from the reproduction signal;

Fig. 6 is a table showing the type information of the synchronization code according of the preferred embodiment, and the values of the corresponding code words;

Fig. 7 is a diagram showing the method of selecting type information code 1 or type information code 2 in the synchronization code in the preferred embodiments of the invention;

Fig. 8 is a block diagram of an optical disk

- 18 -

recording apparatus according to the second embodiment of the present invention;

Fig. 9 is a flow chart showing the process executed by the optical disk recording apparatus of the second embodiment;

Fig. 10 is a flow chart showing the detail of the type information selection process in steps S914, S920, S923, and S926 in Fig. 9;

Fig. 11 is a block diagram of an optical disk reproduction apparatus according to a third embodiment of the present invention;

Fig. 12 is a block diagram showing the detail of the synchronization code detector and read controller shown in Fig. 11;

Fig. 13 is a block diagram of the shift register and detector shown in Fig. 12;

Fig. 14 is a flow chart showing the data reproduction process executed by the optical disk reproduction apparatus 1100 according to the present invention;

Figs. 15A and 15B are diagrams showing the data structure of the data and synchronization code before modulation for recording to the recording medium according to an alternative embodiment of the invention;

Fig. 16 is a diagram showing the data structure of the synchronization codes SYS0 - SYS5 in an alternative embodiment of the invention;

Fig. 17 is a table similar to that shown in Fig. 6,

- 19 -

but for the synchronization codes according of an alternative embodiment of the invention;

Fig. 18 is a plan view of an optical recording disk of a rewritable type particularly showing an arrangement of the markings according to the present invention;

Fig. 19 is a plan view of an optical recording disk of a non-rewritable type particularly showing an arrangement of the markings according to the present invention; and

Fig. 20 shows the data format of the block used as the error correction processing unit according to the prior art.

Detailed Description of the Preferred Embodiments

Embodiment 1

Fig. 1 is a data table showing the data and synchronization code to be written to a recording medium according to the first embodiment of the invention; the data and synchronization code are shown before data modulation.

Data is written to the optical disk in data blocks (the error correction processing unit) of 168 x 168 bytes not including the synchronization code. Fig. 1 is a conceptual data table showing the data in one data block in a hypothetical two-dimensional array.

Each row in this 2D data block array is identically formatted. More specifically, each row in the block comprises a synchronization code (2 bytes), data frame 1 (84 bytes), another synchronization code (2 bytes), and data frame 2 (84

- 20 -

bytes). Each row starts with synchronization code S1, S2, or S3 written before data frame 1, to which data D1,1, D2,1, ... D156,1 is written. Synchronization code S4 is then written before data frame 2, to which data D1,2, D2,2, ... D156,2 is written. A 10-byte parity code Pr corresponding to the data in the two frames written to the same row is written to the last ten bytes of the data written to data frame 2.

Each block comprises twelve sectors SEC1-SEC12 each comprising fourteen rows as shown in Fig. 1 in this example. The sector address is written at the beginning of each sector to the data area of the data frame following synchronization code S1 or S2.

Synchronization code S1 is written immediately before data frame 1 in sector SEC1 at the beginning of the block, and thus identifies the beginning of a data block. Synchronization code S2 is written immediately before data frame 1 at the beginning of the first row in each sector other than sector SEC1 at the beginning of the first block, and identifies the start of a data sector. Synchronization code S3 is written immediately before data frame 1 in rows 2-14 of every sector, and identifies the start of each new row other than the first row in the block or sector. Synchronization code S4 is written immediately before data frame 2 in every row, and identifies the approximate middle of each row.

The fourteenth row of each sector is the column parity row Pc. A 12-byte parity code is written for each 156 data bytes collected columnwise from rows 1-13 in each sector

- 21 -

(corresponding to 12 bytes per row ($12 \times 13 = 156$)), and the seven 12-byte parity codes are written byte by byte to the parity row Pc1-Pc24 (row 14) in the corresponding column. The parity rows written to row 14 of each sector are used for error
5 correction processing after all data in one block is read.

The data blocks thus formatted are converted to code words by 8-15 conversion as described below, and then modulated with NRZI modulation to generate a channel signal for writing to an optical disk or other recording medium.
10 Note that the synchronization codes S1-S4 are converted to code sequences of which the identifier is expressed by a pattern that will not appear in the data frame (i.e., the data being recorded) according to the coding rules used for 8-15 conversion.

15 Figs. 2 and 3 are conversion tables showing an example of the 8-15 conversion used in this embodiment of the invention.

As shown in Figs. 2 and 3, the 8-15 conversion method of this embodiment assigns at least one code word
20 expressed by a 15-bit pattern for each 8 data bits (1 byte). In the table of Figs. 2 and 3, the MSB of the 15-bit pattern serves as a merging bit for connecting the code words. All the merging bits are shown as 0, but can be changed to 1 in accordance with a DC control. The detail of the DC control
25 is disclosed in U.S. Patent No. 4,728,929 to S. Tanaka issued March 1, 1988, which is herein incorporated by reference.

The code words converted by this 8-15 conversion

- 22 -

method are generated so that a maximum of thirteen (or twelve) and a minimum of two zeroes [0] occur consecutively between 1s in any consecutive code word sequence. Thus, when the code word sequence is expressed by the inversion periods of the NRZI channel signals corresponding to the code words, the maximum inversion period T_{\max} is $14T$ (or $13T$) and the minimum inversion period T_{\min} is $3T$ where T is the length of one code word bit. Note that the code words are controlled so that the maximum and minimum numbers of consecutive 0s between 1s satisfy these T_{\max} and T_{\min} parameters even in the junctions between code words.

Fig. 4 is used to describe the data structure of the synchronization codes S1-S4 in this embodiment of the invention. Note that in Fig. 4 "x" represents bits with a code value of either zero (0) or one (1).

The synchronization codes S1-S4 have a data length of two bytes, expressed by a 30-bit code sequence. Each synchronization code comprises an identifier for discriminating the synchronization code from other data, and type information identifying the location in the data block to which the synchronization code is inserted.

The identifier is a code sequence of fifteen zeroes (0) preceded and followed by a one (1) on each end, i.e., is expressed in the NRZI-modulated channel signal as inversion interval $T_S = T_{\max} + 2T$ (or $T_{\max} + 3T = 16T$). Note that this code sequence and inversion interval only appear in the synchronization code, i.e., do not appear in the code words expressing

- 23 -

data other than the synchronization codes (i.e., "non-synchronization code data") or in the corresponding NRZI channel signal.

5 The type information is expressed by the five bits from bit 22 to bit 26 of the synchronization code. Note, further, that only the type information may vary in the synchronization code, and all other parts of the synchroni-
10 zation code are fixed code sequences common to every synchroni- zation code. The fixed code sequences are also defined to satisfy the 8-15 conversion coding rules where the synchroni-
zation code and the non-synchronization code data meet.

The 15-bit code sequence occupying the second half of the synchronization code is a code sequence selected that also exists as a code word generated by 8-15 conversion. This
15 15-bit code sequence is one code word, the smallest data unit of the 8-15 conversion method, and the smallest data read unit of the 8-15 conversion is therefore also defined as 15 bits. As a result, the 5-bit type information cannot be read alone as meaningful data unless a new data format for reading 5-bit
20 code sequences is defined. Therefore, by defining the last 15-bit code sequence in the synchronization code as one code word, the code word containing the type information can be read in the same manner as the other data during 8-15 reverse conversion of the signal reproduced from the recording medium.

25 Instead of the 8-15 conversion, it is possible to use a 8-16 conversion.

The selection of the bit lengths T_{\max} and T_{\min} will

- 24 -

be further explained below.

When the NRZI channel signal, such as shown in Fig. 7 (c) is recorded on an optical disk or other recording medium, a pit or a marking is formed along a disk track correspondingly to a HIGH level portion of the NRZI channel signal, and no pit or no marking is formed correspondingly to a LOW level portion. Since the pits or the markings are formed, for example, by the laser beam, it is necessary to limit the length of such pits or such markings and the interval length therebetween as explained next. If the length of the marking or the marking interval is relatively long, the stability of the PLL control necessary for producing the read clock will be decreased, resulting in wider variation of the reproduced signal level after a high pass filter. Also, if the laser beam is radiated for a relatively short term, no pit or no marking will be formed on the disk, or the pit or marking will be too small to read.

For these and other reasons, according to the present invention, a pit or a marking for the data (such as video and/or audio data) has the maximum pit length or the maximum marking length T_{\max} of $14T$ (or $13T$), a special pit or a special marking for an identifier in the synchronization code has the pit length TS which is equal to $T_{\max} + nT$ in which n is an integer equal to or greater than 2 and T is a unit length representing one binary code. According to one embodiment, $n=2$, and according to a preferred embodiment, $n=3$. By selecting the pit or marking length of the identifier

- 25 -

longer than any pit or marking in the data, it is possible to discriminate the identifier from the data.

Also according to the present invention the minimum pit length or the minimum marking length T_{\min} for a pit or a marking for data and for synchronization code is determined as $3T$.

Fig. 5 is used to describe the relationship between the reproduction signal reproduced from an optical disk according to the present embodiment, and the NRZI channel signal read from the reproduction signal. Fig. 5 (a) shows the reproduction signal reproduced for the synchronization code identifier, and the read threshold value V_C therefor. Fig. 5 (b) shows the read clock supplied at bit interval T . Fig. 5 (c) shows the comparator output signal when the reproduction signal and the read threshold value $V_C = V_0$ are input. Fig. 5 (d) shows the NRZI channel signal obtained by sampling the comparator output signal shown in Fig. 5 (c) at the read clock shown in Fig. 5 (b). Fig. 5 (e) shows the comparator output signal when the reproduction signal and a read threshold value V_C exceeding the tolerance range ($V_C = V_0 + \Delta V$) are input. Fig. 5 (f) shows the NRZI channel signal obtained by sampling the comparator output signal shown in Fig. 5 (e) at the read clock shown in Fig. 5 (b). Note that the comparator output signal inverts to a HIGH level at the intersection of the reproduction signal and the read threshold value V_C , and the NRZI channel signal in Fig. 5 (d) inverts from a LOW to a HIGH level at time t_0 .

- 26 -

The reproduction signal reproduced from the recording medium is obtained as an analog signal as shown in Fig. 5 (a). The reproduction signal is therefore converted to a digital signal by means of the comparator converting values equal to or greater than the read threshold value V_C to HIGH bits, and values below the read threshold value V_C to LOW bits. The digitized comparator output signal is then sampled at the read clock timing shown in Fig. 5 (b), generating the NRZI channel signals shown in Figs. 5 (d) and (f). The read clock phase and read threshold value are controlled so that the comparator output signal inverts at a particular reference position, which is defined here as the median between the current read clock and the next read clock. However, when the read threshold value V_C is not stable, such as at the start of reproduction signal reading, the read threshold value V_C will vary as shown in Fig. 5 (a). This variation in the read threshold value V_C appears as offset ΔT from the reference position of the timing at which the comparator output signal inverts.

If the NRZI channel signal shown in Fig. 5 (d) is the result of correct signal reading, the tolerance range V_{Cmin} to V_{Cmax} for variation in the read threshold value V_C (i.e., the range in which NRZI channel signal read errors do not occur) must be in the range $-(T/2) < \Delta T \leq (T/2)$, shown from time $(t_0 - T)$ to time t_0 in Fig. 5 (a), where ΔT is the offset from the reference position of comparator output signal inversion timing. As shown in Fig. 5 (c), the comparator

- 27 -

output signal inversion timing is within the tolerance range $-(T/2) < \Delta T \leq (T/2)$ from time $(t_0 + 15T)$ to time $(t_0 + 16T)$, producing offset ΔT from the reference position. The correct sampling value can therefore be obtained by the read clock at time
5 $(t_0 + 16T)$.

However, when the offset ΔT from the inversion timing reference position of the comparator output signal exceeds the tolerance range expressed as $-(T/2) < \Delta T \leq (T/2)$ due to read threshold value V_c fluctuation, the inversion interval
10 is offset (shifted) $\pm T$ at the NRZI channel signal rise and $\pm T$ at the NRZI channel signal drop.

Therefore, when the relative variation in the read threshold value V_c to the reproduction signal temporarily exceeds the read threshold value V_c tolerance range due, for
15 example, to noise, the inversion position of the NRZI channel signal expressing the synchronization code and data shifts one bit ($\pm T$). In other words, the position of the 1 in the code sequence of the corresponding code word sequence shifts 1 bit to the adjacent code bit. There is a high probability that
20 data read errors of this type can be properly corrected by the error correction process of the reproduction apparatus. Conversely stated, if the optical disk reproduction apparatus is not designed with tolerance sufficient to correct 1-bit shifts in the inversion position occurring at a normal
25 frequency due to noise or other factors, the optical disk reproduction apparatus will not be able to withstand everyday use. It can therefore be assumed that the inversion interval

- 28 -

of the reproduced NRZI channel signal will virtually never shift $2T$ or greater due to factors such as noise.

It is possible in this case that the maximum inversion interval $T_{\max}=14T$ in the NRZI channel signals for non-synchronization code data may be read as an interval of $13T$ or $15T$, but there is virtually no possibility that it will be read as $12T$ or $16T$. It is also possible that the inversion interval $T_S=16T$ of the synchronization code identifier will be read as a $15T$ or $17T$ interval. In this case, however, because there is no signal segment that inverts with an inversion interval of $16T$ or greater in the NRZI channel signals expressing non-synchronization code data, the non-synchronization code data and synchronization code can be correctly identified by determining that any signal segment with an inversion interval of $16T$ or greater is a synchronization code identifier. The identifier for a synchronization code read with a $15T$ inversion interval will not be valid at this time, but the invalidated synchronization code is prevented from being read as non-synchronization code data by a separate determination cross-referencing the periodicity of the synchronization code in the NRZI channel signal.

However, if the change in the read threshold value V_C above the tolerance range is sustained at $V_C=V_0+\Delta V$ as shown by the double-dot-dash line in Fig. 5 (a), a read error of inversion interval T will occur at the inversion part of the NRZI channel signal at both ends of the synchronization code identifier, and in the data following that synchronization

- 29 -

code, as shown in Fig. 5 (f). When this happens, a signal segment with a $16T$ inversion interval, i.e., a signal segment that should not occur in the non-synchronization code data, occurs in the non-synchronization code data. As a result, by
5 determining any signal segment with an inversion interval of $16T$ or greater to be the synchronization code identifier, the reproduction apparatus determines an indeterminate part of data that is not the synchronization code data to be the beginning of some frame, thereby disrupting the data read
10 synchronization timing, and preventing any subsequent data from being read. Even if the synchronization is not disrupted, the probability is low that the read errors resulting from the reproduced data will be correctable by the error correction process. As a result, optical disk readers detect
15 a data read problem when plural signal segments with an inversion interval of $16T$ or greater are detected, and execute an appropriate process.

By thus defining the length of the inversion interval TS of the synchronization code identifier as
20 $TS = T_{\max} + 2T$ or greater, the synchronization code can be accurately discriminated from the non-synchronization code data within the data read range. Furthermore, by defining the length of the inversion interval TS of the synchronization code identifier as $TS = T_{\max} + 2T$ or greater, the length of the
25 synchronization code identifier can be shortened compared with an inversion interval TS of $2T_{\max}$ as in the synchronization code of the prior art, and this difference can be used to

- 30 -

include other type information adding a variety of other functions in the synchronization code. Moreover, because the overall length of the synchronization code can be set to twice the code word length, the first and second halves of the synchronization code can be separated in the same way as
5 reading the code words expressing non-synchronization code data, and the type information written to the code word constituting the second half of the synchronization code can be read in the same way the code words expressing the non-synchronization code data can be read.
10

Fig. 6 is another data table showing the type information of the synchronization code according of the present embodiment, and the read values of the corresponding code words.

15 The type information written to the five bits from bit 22 to bit 26 of the synchronization codes S1-S4 formatted as shown in Fig. 4 identify the location in the data block to which the synchronization code is inserted. Synchronization code S1 indicates that said synchronization code S1 is
20 inserted at the beginning of the data block, i.e., at the beginning of sector SEC1, by using type information 1 (10010) or type information 2 (00010). Synchronization code S2 likewise indicates that said synchronization code S2 is inserted at the beginning of any sector other than the first
25 sector in the data block, i.e., to sectors SEC2-SEC14, by using type information 1 (01001) or type information 2 (01000). Synchronization code S3 likewise indicates that the

- 31 -

synchronization code is inserted at the beginning of any row other than the first row in any sector by using type information 1 (10001) or type information 2 (10000). Synchronization code S4 indicates that the synchronization code is
5 inserted in the beginning of data frame 2 starting from the middle of any row by using type information 1 (00000) or type information 2 (00001).

As also shown in Fig. 6, the type information is read by reading the normal code word unit containing the type
10 information. For example, the type information 1 (10010) of synchronization code S1 is inserted to the five bits from bit 22 to bit 26 of the synchronization code as shown in Fig. 4. The code pattern of the synchronization code S1 containing this type information 1 code (10010) is therefore
15 (001000000000000000100100100010), and the code word containing this type information 1 code (10010) in this synchronization code S1 is (000100100100010). As a result, the code word part of the synchronization code S1 containing the type information 1 code 10010 is read as 114 as shown in the 8-15 data
20 conversion table in Fig. 2. The code word part of a synchronization code S1 containing the type information 2 code 00010 is similarly read as a value of 86. If the code word read immediately after recognizing the synchronization code identifier is 114 or 86, the identified synchronization code
25 is known to be the synchronization code S1 inserted to the beginning of the block. Synchronization codes containing other type information are recognized in the same manner.

- 32 -

Note that while type information codes 1 and 2 indicate the same synchronization code insertion position, the number of ones contained in the five type information bits is even in type information code 1, and odd in type information
5 code 2.

Fig. 7 is used to describe the method of selecting type information code 1 or type information code 2 in the synchronization code of this embodiment. Note that the method for selecting the type information codes 1 and 2 for synchronization code S4 is shown in Fig. 7 by way of example only,
10 and the same method is used to select the type information codes 1 and 2 for synchronization codes S1-S3. Note also that synchronization code S4 is inserted between frames 1 and 2 as shown in Fig. 1.

15 Fig. 7 (a) shows the code pattern common to all synchronization codes. Fig. 7 (b) shows the change in the digital sum variation (DSV) when type information code 1 is selected as the type information for synchronization code S4. Fig. 7 (c) shows the change in the digital sum variation (DSV)
20 when type information code 2 is selected as the type information for synchronization code S4. The DSV is the value per unit time obtained by adding +1 if the NRZI channel signal wave is a HIGH level, and adding -1 if the wave is a LOW level, and expresses the bias in the dc component of the NRZI
25 channel signal. Note also that the DSV is a value added cumulatively from a particular position in the data to be recorded, e.g., from the beginning of the data to be recorded,

- 33 -

or from the beginning of the block.

As shown in Fig. 1, synchronization code S4 is inserted between data frames 1 and 2 in each row. To determine which type information 1 or 2 is appropriate to synchronization code S4, the DSV value is added cumulatively from the beginning of the data to be recorded to the end of the first frame, i.e., the position immediately before the insertion point of synchronization code S4. A DSV memory stores at time point Tx (Fig. 7) the level of the NRZI channel signal and the DSV value, and in the case shown in Fig. 7, the DSV memory stores HIGH level and d=12. The DSV value d1 at a particular DSV comparison point in frame 2 is then calculated using as the type information inserted to the synchronization code S4 type information 1 (00000). Type information 2 (00001) is then substituted for type information 1, and the DSV value d2 at said DSV comparison point in frame 2 is calculated. The calculated DSV values d1 and d2 are then compared, and the type information yielding the lowest absolute value of the DSV at the DSV comparison point in frame 2 is selected and inserted to the synchronization code S4.

The DSV values up to the fifth bit at the beginning of frame 2 are 4 using type information 1 as shown in Fig. 7 (b), and 6 using type information 2 as shown in Fig. 7 (c). The DSV values continue to be calculated to the particular DSV comparison position in frame 2, however, and the absolute values of the DSV values are compared at the DSV comparison point to select the type information whereby said absolute

- 34 -

value is smallest. As a result, bias in the dc component can be suppressed when data is written to the recording medium using the format shown in Fig. 1. Moreover, when compared with the common method of suppressing bias in the dc component by inserting to the data a separate code sequence for suppressing dc component bias, dc component bias can be suppressed using the type information expressing the synchronization code type. The length of the code sequence inserted for dc component bias suppression can therefore be shortened, and the data storage area of the recording medium can be more effectively utilized.

As described above, the reproduction apparatus according to the present invention can easily identify the beginning of the data block by reading synchronization code S1, and can achieve a robust error correction processing capability using the data written to one data block as the error correction processing unit.

The location of frame 1, to which each sector address in that block is written, can also be easily identified by reading synchronization code S2. It is therefore possible to read the data from a specific block in a short time even when a specific block is accessed and reading starts from some midpoint in that block by reading the sector address following the synchronization code S2 at the beginning of the next immediate sector, temporarily buffering the data from that sector to the last sector in the targeted block to memory, then reading the data from the beginning of the

- 35 -

targeted block to the initially accessed sector (i.e., the remaining sectors in that block), and inserting this data before the data buffered to memory.

Furthermore, because the location of the frame to which the sector address is written can be easily identified, the desired tracks can be accessed while reading only the addresses, and high speed searching can be achieved.

It is also possible with synchronization codes S1-S4 to recognize the first code word bit in each frame, and correct bit shifting in the reproduced data resulting from bit loss caused by signal dropout during data reproduction, for example.

A signal segment in which the inversion interval TS of the NRZI channel signal corresponding to the synchronization code identifier is $TS = (T_{\max} + 2T)$ has been used by way of example in the above embodiment, but a signal segment in which said inversion interval $TS = (T_{\max} + 3T)$ may be alternatively used. Even if the read threshold value V_c temporarily varies outside the tolerance range, and the inversion interval shifts $\pm T$ in part of the read NRZI channel signals, the maximum inversion interval T_{\max}' of the NRZI channel signal expressing the non-synchronization code data will be

$$T_{\max} - T \leq T_{\max}' \leq T_{\max} + T,$$

and the inversion interval TS' of the NRZI channel signal read as the synchronization code identifier will be

$$T_{\max} + 2T \leq TS' \leq T_{\max} + 4T.$$

The inversion interval TS of the NRZI channel signal

- 36 -

corresponding to the synchronization code identifier can be considered as the pit or marking length formed on a disk, or as an interval length of such pits or markings. According to the present invention, the pit length TS of the identifier is
5 $(T_{\max}+2T)$ or greater, but is best when it is $(T_{\max}+3T)$, as explained below.

During reading or writing (herein after only the reading case is explained, but also applied to the writing case) a pit or a marking (herein after generally referred to
10 as a marking, but understood as including both pit and marking and any other type of markings such as a projection) on the disk, it is known that the marking length T_{\max} may be erroneously read as $(T_{\max}+T)$.

When the marking length TS of the identifier is
15 $(T_{\max}+2T)$, this can be erroneously read as $(T_{\max}+2T)\pm T$ which is equal to $(T_{\max}+T)$ or $(T_{\max}+3T)$. And, under the same condition, the maximum data marking length T_{\max} can be erroneously read as $(T_{\max}\pm T)$ which is equal to $(T_{\max}-T)$ or $(T_{\max}+T)$. In this case, by accepting the markings with a
20 marking length not only $(T_{\max}+2T)$, but also $(T_{\max}+3T)$ as the identifier, it is possible to discriminate between the identifier markings and the maximum markings in the data with a higher reliability than by accepting only the marking with a marking length $(T_{\max}+2T)$ as the identifier. In this case,
25 the identifier that has been erroneously read as $(T_{\max}+T)$ is disregarded, because this can not be distinguished with the maximum marking in the data that has been erroneously read as

- 37 -

 $(T_{\max}+T)$.

When the marking length TS of the identifier is $(T_{\max}+3T)$, this can be erroneously read as $(T_{\max}+3T)\pm T$ which is equal to $(T_{\max}+2T)$ or $(T_{\max}+4T)$. And, under the same condition, the maximum data marking length T_{\max} can be erroneously read as $T_{\max}\pm T$ which is equal to $(T_{\max}-T)$ or $(T_{\max}+T)$. In this case, the markings with a marking lengths $(T_{\max}+2T)$, $(T_{\max}+3T)$ and $(T_{\max}+4T)$ can be used as the identifier, and yet it is possible to distinguish between the identifier markings and the maximum markings in the data. Thus, the discrimination between the identifier markings and the maximum markings in the data can be made with a higher accuracy when the marking length TS of the identifier is made $(T_{\max}+3T)$ rather than $(T_{\max}+2T)$.

By determining the signal segment where the inversion interval of the read NRZI channel signal is $(T_{\max}+2T)$ or greater to be the synchronization code identifier, the synchronization code can be correctly distinguished from the non-synchronization code data, the number of invalid synchronization codes can be decreased, virtually all of the synchronization codes can be correctly identified, and the start of the frame can be identified. It is therefore possible to more precisely correct any data bit shifting resulting from code bit loss caused by, for example, signal dropout during reproduction. When the read threshold value V_c continues to range outside the tolerance range, it is also possible to detect abnormal signal reading, i.e., a read

- 38 -

problem, by detecting signal segments in which the NRZI channel signal inversion interval is $(T_{\max} + 5T)$ or greater.

It is to be noted that the five bit type information described above shall not be limited to the correspondence
5 between bit patterns and type information content as described above. More specifically, type information 1 and type information 2 are bit pattern pairs in which one bit pattern contains an odd number of ones (1) and the other pattern contains an even number of ones (1) in a pattern of five bits,
10 and any patterns can be used insofar as the code word part of the synchronization code containing the type information is a pattern that is also found in the code word patterns. The type information may also be placed at the front of the identifier.

15 It should also be noted that the type information selection method described above calculates the DSV values from the beginning of the data to be recorded to a particular position in the frame immediately following the synchronization code to which the type information is inserted, and
20 selects the type information whereby the absolute value of the DSV is smallest. The DSV calculation range that is the reference for selecting the type information is not, however, thus limited.

Specifically, it is also possible to cumulatively
25 add the DSV values from the beginning of the block (or from the beginning of the frame immediately before the synchronization code, or from a particular position in the frame

- 39 -

immediately before the synchronization code) to immediately before the synchronization code; calculate the DSV value to a particular position in the frame following the synchronization code using the synchronization code containing type information 1 and then recalculating the DSV value using the synchronization code containing type information 2; and then select the type information whereby the absolute value of the DSV value calculated to a particular position in the frame following the synchronization code is smallest.

10 Figs. 18 and 19 show optical disks recorded with the NRZI channel signal according to the present invention. The optical disk shown in Fig. 18 is a rewritable disk RD (CAV), and the optical disk shown in Fig. 19 is a non-rewritable disk ND (CLV), i.e., a read only disk.

15 Referring to Fig. 18, the data stored in the rewritable disk RD is arranged as explained below.

A new rewritable disk RD without any recording has embossed with pre-pits along a track at predetermined locations. These pre-pits serve as addresses for accessing the disk. The recording is carried out by a laser beam which makes ON and OFF markings along the track. The markings may be done by changing the physical parameter, such as reflectance, of the disk surface. ON marking is the place where such a physical change is added, and OFF marking is the place where no such a physical change is added. As shown at the bottom of Fig. 18, according to a preferred embodiment of the present invention, the longest marking is the marking for the

- 40 -

identifier ID which has a length of 14T. It is to be noted that in Fig. 18, the identifier ID is shown as formed by ON marking, but can be formed by OFF marking (a marking between two ON markings).

5 As shown in Fig. 18, in the rewritable disk RD, the recorded codes along the tracks are: sector address SA; synchronization code S1; data (such as video and audio data) and header codes D/H; synchronization code S4; data and parity codes D/P; synchronization code S3; data D; ... sector address
10 SA; synchronization code S2; data and header D/H; synchronization code S4; data and parity codes D/P; ... synchronization code S4; and parity codes P.

 According to a preferred embodiment of the present invention, the longest entry of the markings in the synchroni-
15 zation codes is the identifier ID, which has the length of 14T, and the longest entry of the marking in the disk other than in the synchronization codes is limited to 11T. Here the longest entry marking can be either ON marking or OFF marking.

 As shown in Fig. 19, in the non-rewritable disk ND,
20 the recorded codes along the tracks are: synchronization code S1; data (such as video and audio data) and header codes D/H; synchronization code S4; data and parity codes D/P; synchroni-
zation code S3; data D; synchronization code S4; data and parity codes D/P; synchronization code S3; data D; ...
25 synchronization code S2; data and header codes D/H; ... synchronization code S4; and parity codes P.

 According to a preferred embodiment of the present

- 41 -

invention, the longest entry of the pits in the synchronization codes is the identifier ID, which has the length of 14T, and the longest entry of the pits in the disk other than in the synchronization codes is limited to 11T. Here the longest
5 entry pits can be either an ON pit portion where the pits are formed or an OFF pit portion which is an interval between the pits.

Embodiment 2

Fig. 8 is a block diagram of an optical disk
10 recording apparatus 800 described below as the second embodiment of the present invention.

As shown in Fig. 8, this optical disk recording
apparatus 800 comprises an input section 801, memory 802, a
parity generator 803, coding unit 804, FIFO buffer 805,
15 synchronization code inserter 806, DSV calculator 807,
synchronization code pattern memory 808, and DSV memory 809.

The data to be recorded to the optical disk is input
through the input section 801, which writes the input data one
frame at a time to a particular position (address) in the
20 memory 802.

The memory 802 stores non-synchronization code data
formatted with a particular structure as shown in Fig. 1.

The parity generator 803 generates parity data
corresponding to the row and column elements of the input data
25 written in the format shown in Fig. 1 to a known address in
the memory 802, and writes the generated parity data to a
known address in the memory 802.

- 42 -

The coding unit 804 reads the non-synchronization code data written to the memory 802 sequentially from the beginning of the block, converts the read data to code words according to the 8-15 conversion table and conversion rules shown in Figs. 2 and 3, and then writes the converted code words to the FIFO buffer 805.

The synchronization code inserter 806 counts the code words written to the FIFO buffer 805, and determines for each frame the type of synchronization code to be inserted at the beginning of each frame. After the synchronization code type information to be inserted at the beginning of the frame written to the FIFO buffer 805 is selected by the DSV calculator 807, the synchronization code inserter 806 reads the selected type information and the coding pattern of the fixed part of the synchronization code from the synchronization code pattern memory 808, and then generates the synchronization code by inserting the type information to a predetermined position in the fixed code part of the synchronization code. After outputting the generated synchronization code, the synchronization code inserter 806 reads and outputs the frame following said synchronization code from the FIFO buffer 805. The frame and synchronization code output from the synchronization code inserter 806 is then converted to an NRZI channel signal, and written to a particular address on the optical disk or other recording medium.

The DSV calculator 807 reads the coding pattern for the fixed part of the synchronization code, and type infor-

- 43 -

mation 1 and 2 identifying the synchronization code type determined by the synchronization code inserter 806, from the synchronization code pattern memory 808, and generates the code sequences of the synchronization codes to which type information 1 and type information 2 are inserted. It then reads the code sequence input to the FIFO buffer 805 from the beginning of the frame following said synchronization code to the particular DSV comparison point in that frame, and generates the code word sequence for the case in which a synchronization code containing type information 1 is inserted to the beginning of the read code word sequence. A similar code word sequence is also generated for a synchronization code containing type information 2 inserted to the beginning of the read code word sequence.

The DSV calculator 807 then converts the two generated code word sequences to NRZI channel signals referenced to the signal level of the NRZI channel signal stored to the DSV memory 809, and calculates the DSV of the NRZI channel signal corresponding to the two code word sequences from the DSV value stored to the DSV memory 809. The DSV calculator 807 then compares the absolute values of the two DSV calculation results at the end of the code word sequence, i.e., at the DSV comparison point of the frame following the synchronization code, and selects the type information resulting in the DSV calculation result with the smallest absolute value at the DSV comparison point. The DSV calculator 807 then updates the content stored to the DSV

- 44 -

memory 809 with the DSV calculation result having the lowest absolute value at the DSV comparison point, and the signal level at the DSV comparison point of the NRZI channel signal in which the absolute value of the DSV calculation result is lowest. Then, based on the content stored to the updated DSV memory 809, the DSV calculator 807 again calculates the DSV as described above from the DSV comparison point to the end of the frame, and again updates the content of the DSV memory 809 with that calculation result and the NRZI channel signal level at the end of the frame.

The synchronization code pattern memory 808 stores the code sequence of the fixed part of the synchronization code shown in Fig. 4, and the 5-bit patterns of type information 1 and 2 corresponding to the synchronization code type (S1-S4) shown in Fig. 6. The DSV memory 809 stores the DSV value updated by the DSV calculator 807, and the level of the corresponding NRZI channel signal.

Fig. 9 is a flow chart of the process executed to record the data containing a synchronization code thus generated in an optical disk recording apparatus according to the present embodiment of the invention.

The data input to the input section 801 (step S901) is sequentially written frame by frame to a known address in the memory 802 (step S902). When all of the data is written to the memory 802 (step S903), parity data is generated for the row and column elements of the data stored to the memory 802 (step S904), and the generated parity data is then written

- 45 -

to a known address in the memory 802 (step S905).

The synchronization code inserter 806 initializes each of the parameters used to evaluate the type of the synchronization code to be inserted at the beginning of the data read from the memory 802. The DSV calculator 807 also
5 initializes the content stored to the DSV memory 809.

More specifically, the parameters i , j , and k are initialized to the values $i=0$, $j=1$, and $k=1$, where i is the parameter for tracking whether the frame read from the memory
10 802 is frame 1 ($i=1$) or frame 2 ($i=2$) (the frame count parameter i); k ($1 \leq k \leq 14$) is the parameter for counting the number of rows in each frame (the row count parameter k); and j ($1 \leq j \leq 12$) is the parameter for counting the sector number (the sector count parameter j). The initialization values of
15 the NRZI channel signal level and the initial DSV value stored to the DSV memory 809 are, for example, LOW and zero (0), respectively (step S906).

If unprocessed data remains in the memory 802 (step S907), the coding unit 804 reads one frame of data from the
20 memory 802 using a known data processing unit (step S908), codes the read data to code word sequences comprising a 15-bit code word for each eight bits of read data using 8-15 conversion, and writes the resulting code word sequence to the FIFO buffer 805 (step S909).

25 When a code word sequence for one frame of data is written to the FIFO buffer 805, the synchronization code inserter 806 increments the frame counter parameter i (step

- 46 -

S910).

If the frame count parameter $i=1$ (step S911), the row count parameter $k=1$ (step S912), and the sector count parameter $j=1$ (step S918), the synchronization code inserter 806 determines that the type of the synchronization code that should be inserted to the beginning of the frame written to the FIFO buffer 805 is synchronization code S1, i.e., the synchronization code indicating the beginning of a data block (step S919).

10 Using the synchronization code type (synchronization code S1 in this example) determined by the synchronization code inserter 806 inserted to the beginning of frame 1 written to the FIFO buffer 805, the DSV calculator 807 then calculates the DSV value at the DSV comparison point in frame 1 using
15 both type information 1 and type information 2 inserted to the selected synchronization code S1, and selects the type information yielding the DSV value with the lowest absolute value at the DSV comparison point in frame 1 (step S920). Note that the process executed in step S920 is described in
20 greater detail below with reference to Fig. 10.

The synchronization code inserter 806 then generates a synchronization code with the type information selected by the DSV calculator 807 (step S921).

25 The synchronization code inserter 806 then reads frame 1 from the FIFO buffer 805, inserts the generated synchronization code to the beginning of the frame (step S916), outputs that frame (step S917), and then loops back to

- 47 -

step S907.

If in step S911 the frame count parameter $i=1$ and in step S912 the row count parameter $k=1$ and the sector count parameter $j=1$ in step S918, the synchronization code inserter
5 806 determines that the type of synchronization code to be inserted to the beginning of the frame written to the FIFO buffer 805 is synchronization code S2, i.e., the synchronization code identifying the beginning of a sector (step S922).

The DSV calculator 807 then selects the type
10 information of synchronization code S2 in step S922 using the same process executed in step S923.

The synchronization code inserter 806 then generates a synchronization code S2 containing the type information selected by the DSV calculator 807 (step S924), and loops back
15 to step S916.

If, however, the sector count parameter $k \neq 1$ in step S912, the synchronization code inserter 806 determines that the type of the synchronization code to be inserted to the beginning of the frame written to the FIFO buffer 805 is
20 synchronization code S3, i.e., the synchronization code identifying the beginning of a row other than the first row in the data block or sector (step S913).

The DSV calculator 807 then selects the type information of synchronization code S3 in step S914 using the
25 same process executed in step S920.

The synchronization code inserter 806 then generates a synchronization code S3 containing the type information

- 48 -

selected by the DSV calculator 807 (step S915), and loops back to step S916.

If in step S911 the frame count parameter $i=2$, i.e., $i \neq 1$, the synchronization code inserter 806 determines that the
5 type of synchronization code to be inserted to the beginning of the frame written to the FIFO buffer 805 is synchronization code S4, i.e., the synchronization code written to the middle of each row and identifying the beginning of frame 2 (step S925).

10 The DSV calculator 807 then selects the type information of synchronization code S4 in step S926 using the same process executed in step S914.

The synchronization code inserter 806 then generates a synchronization code S4 containing the type information
15 selected by the DSV calculator 807 (step S927).

The synchronization code inserter 806 then resets the frame count parameter i to 0 ($i=0$), because the next frame written to the FIFO buffer 805 will be frame 1 in the next row, and increments the sector count parameter k (step S929).

20 If the value of the row count parameter k is $14 < k$ (step S930), the next frame written to the FIFO buffer 805 will be the first frame in the next sector, and the sector count parameter j is therefore incremented, and the row count parameter k is reset to 1 (step S931). If step S930 returns
25 NO, i.e., if the row count parameter k is not greater than 14, the process skips forward to step S916.

If at step S932 the sector count parameter j is also

- 49 -

12<j as the result of the increment at step S931, the frame next written to the FIFO buffer 805 will be the first frame 1 in the next data block. The sector count parameter j is therefore reset to j=1 (step S933), and the process returns
5 to step S901.

Step S916 loops back to step S907, and if there is no unprocessed data left in the memory 802, the coding unit 804 terminates processing.

Fig. 10 is a flow chart of the type information selection process executed in steps S914, S920, S923, and S926
10 in Fig. 9.

The DSV calculator 807 reads the 5-bit patterns of type information 1 and 2 indicating the type determined by the synchronization code inserter 806, and the coding pattern of
15 the fixed part of the synchronization code, from the sync code pattern memory 808 (step S1001).

The DSV calculator 807 then generates a code sequence A expressing the synchronization code of a determined type by inserting the read 5-bit pattern for type information
20 1 to bits 22-26 (the fixed part of the coding pattern) of the simultaneously read synchronization code (step S1002).

The DSV calculator 807 likewise generates a code sequence B expressing the synchronization code of the determined type by inserting the read 5-bit pattern for type
25 information 2 to bits 22-26 (the fixed part of the coding pattern) in the simultaneously read synchronization code (step S1003).

- 50 -

The DSV calculator 807 then reads the code word sequence C from the beginning of the frame stored to the FIFO buffer 805 to a predetermined DSV comparison point (step S1004).

5 The DSV calculator 807 then generates the two code sequences A+C and B+C by inserting the synchronization code sequences A and B generated in steps S1002 and S1003 to the beginning of the code word sequence C of the frame read from the FIFO buffer 805 (step S1005).

10 The DSV calculator 807 then generates NRZI channel signals corresponding to the generated code sequences A+C and B+C based on the NRZI channel signal level, stored in the DSV memory 809, of the bit immediately before the synchronization code (step S1006).

15 The DSV calculator 807 then calculates the DSV values for the NRZI channel signals corresponding to code sequences A+C and B+C based on the DSV values of the bit immediately before the synchronization code as stored in the DSV memory 809 (step S1007).

20 The DSV calculator 807 then compares the absolute values $|d1|$ and $|d2|$ where $d1$ is the DSV calculation result at the end of the NRZI channel signal generated for code sequence A+C containing type information 1, and $d2$ is the DSV calculation result at the end of the NRZI channel signal
25 generated for code sequence B+C containing type information 2.

 If $|d1| \leq |d2|$ (step S1008), type information 1 is

- 51 -

selected (step S1009). The DSV calculator 807 then updates the content of the DSV memory 809 by writing the NRZI channel signal level at the end of the NRZI channel signal generated for code sequence A+C containing type information 1, and DSV calculation result d1, to the DSV memory 809, and terminates the type information selection process (step S1010).

However, if $|d1| > |d2|$, i.e., step S1008 returns NO, the DSV calculator 807 selects type information 2 (step S1011). The DSV calculator 807 then updates the content of the DSV memory 809 by writing the NRZI channel signal level at the end of the NRZI channel signal generated for code sequence B+C containing type information 2, and DSV calculation result d2, to the DSV memory 809, and terminates the type information selection process (step S1012).

It is therefore possible by means of the present embodiment to achieve an optical disk recording apparatus 800, and a recording method therefor, for recording to an optical disk or other recording medium data containing a synchronization code that can be accurately and reliably discriminated from the non-synchronization code data, and having various functions.

It should be noted that the recording medium referenced above may be thought of as a transmission path for transmitting said data and synchronization code sequence recorded by said recording apparatus to the reproduction apparatus. An alternative embodiment of the present invention therefore provides a transmission method for transmitting to

- 52 -

a transmission path data containing a synchronization code that can be accurately and reliably discriminated from the non-synchronization code data, and having various functions, as described in the first embodiment above.

5 Embodiment 3

Fig. 11 is a block diagram of an optical disk reproduction apparatus 1100 according to a third embodiment of the present invention. As shown in Fig. 11, this optical disk reproduction apparatus 1100 comprises a synchronization
10 code detector 1101, a type information reader 1102, a read controller 1103, a decoder 1104, an error correction processor 1105, and an output section 1106.

The synchronization code detector 1101 obtains the data containing a synchronization code as described above from
15 the optical disk to which it is recorded as the reproduction signal, digitizes said reproduction signal, converts the digitized signal to an NRZI channel signal, demodulates said NRZI channel signal to a code word sequence (parallel data) comprising 15-bit code words, and outputs to the type
20 information reader 1102. The synchronization code detector 1101 also identifies any signal segment in the demodulated NRZI channel signal in which the inversion interval is 16T or greater as the synchronization code identifier, and outputs a synchronization code detection signal to the type infor-
25 mation reader 1102. When an NRZI channel signal segment with a 16T or greater inversion interval is discriminated, the synchronization code detector 1101 also outputs a set signal

- 53 -

to the read controller 1103.

The type information reader 1102 is, in practice, identical to the decoder 1104, but reads as the data to be processed the code word supplied from the synchronization code
5 detector 1101 immediately after the synchronization code identifier is discriminated, i.e., the code word containing the synchronization code type information immediately following the synchronization code detection signal output. The read type information is output to the read controller
10 1103.

The read controller 1103 detects and corrects read clock phase error at each inversion of the NRZI signal, and synchronizes the first bit of the code word output from the synchronization code detector 1101 to the type information
15 reader 1102 each time the synchronization code detector 1101 identifies the synchronization code identifier (i.e., the NRZI channel signal segment where inversion interval $TS=16T$), i.e., at the set signal timing. The read controller 1103 then reads the content of the data decoded by the decoder 1104 to control
20 the reproduction operation executed by the components of the optical disk reproduction apparatus 1100.

The decoder 1104 reverses the 8-15 conversion process using a data processing unit comprising a predetermined quantity of the 15-bit code words supplied from the
25 synchronization code detector 1101, and writes the result to a known address in a memory (which is not shown).

The error correction processor 1105 then reads the

- 54 -

parity data from the converted data written to said known address in memory (which is not shown), and applies error correction processing to each data block. The data stored to memory is then updated using the error corrected data.

5 The output section 1106 then sequentially reads and outputs the error-corrected data from the memory not shown.

Fig. 12 is a block diagram showing a specific hardware configuration of the synchronization code detector 1101 and read controller 1103 shown in Fig. 11.

10 The synchronization code detector 1101 and read controller 1103 comprise a comparator 1201, threshold level generator 1202, clock extractor 1203, bit synchronizer 1204, shift register 1205, detector 1206, $1/15^{\text{th}}$ frequency divider 1207, and latch circuit 1208.

15 The comparator 1201 compares the reproduction signal reproduced from the optical disk with the read threshold level input from the threshold level generator 1202, and digitizes the input reproduction signal by converting signal values in the reproduction signal equal to or exceeding the read
20 threshold level to HIGH bits, and signal levels below the read threshold level to LOW bits.

The threshold level generator 1202 generates the read threshold level used by the comparator 1201.

25 The clock extractor 1203 is a phase-lock loop (PLL) for generating the read clock from the output signal of the comparator 1201, and synchronizing the period and phase of the read clock so that the output of the comparator 1201

- 55 -

inverts at the reference position, which is the midpoint of the PLL-generated read clock.

The bit synchronizer 1204 samples the comparator output at the timing of the read clock from the clock extractor 1203, converts the reproduction signal to an NRZI channel signal, and then demodulates the resulting NRZI channel signal to an NRZ (non-return to zero) signal.

The shift register 1205 sequentially inputs the NRZ signal expressing the code word as serial data at the read clock timing from the clock extractor 1203, converts 18 bits of the NRZ signal to parallel data, and outputs the result to the detector 1206. Fifteen consecutive bits in the shift register output are also output to the latch circuit 1208.

When a code sequence corresponding to the 16T inversion interval of the NRZI channel signal, i.e., the code sequence (10000000000000001) containing a fifteen bit run of zeroes (0), or a code sequence corresponding to the 17T inversion interval of the NRZI channel signal, i.e., the code sequence (100000000000000001) containing a sixteen bit run of zeroes (0), is input, the detector 1206 outputs the synchronization code detection signal indicating that the synchronization code identifier was identified to the type information reader 1102 (not shown in Fig. 12). When the code sequence (100000000000000001) corresponding to the 16T inversion interval of the NRZI channel signal is input, a set signal is also output to the $1/15^{\text{th}}$ frequency divider 1207.

The $1/15^{\text{th}}$ frequency divider 1207 generates the word

- 56 -

clock by $1/15^{\text{th}}$ frequency dividing the read clock. The $1/15^{\text{th}}$ frequency divider 1207 also synchronizes the word clock phase so that the word clock rise (or fall) is output before the third read clock from the set signal output, i.e., at the
5 twelfth read clock from the set signal.

The latch circuit 1208 holds the 15-bit parallel data from the shift register 1205 at the word clock timing from the $1/15^{\text{th}}$ frequency divider 1207, and outputs to the decoder 1104.

10 Fig. 13 is a block diagram of the hardware configuration of the shift register 1205 and detector 1206 shown in Fig. 12. Note that in Fig. 13 the high bit of the code sequence output from the shift register 1205 is shown on the right, and the low bit is on the left. In addition, the n^{th}
15 bit counted from the highest bit (most significant bit) in the output of the shift register 1205 is referenced as simply bit n below.

The detector 1206 comprises an OR gate 1301, an inverter 1302, a NOR gate 1303, and AND gates 1304 and 1305.

20 Bits 17 and 18 of the parallel data output from the shift register 1205 are input to the OR gate 1301, which outputs 1 when either of the inputs is 1.

Bit 1 of the parallel data output from the shift register 1205 is input to the inverter 1302, which inverts the
25 bit and outputs the inverted bit.

Bits 1 through 16 of the parallel data output from the shift register 1205 are input to the NOR gate 1303, with

- 57 -

bit 1 input through the inverter 1302. If all input bits are 0, the NOR gate 1303 outputs 1.

The output from the NOR gate 1303, and bit 17 of the parallel data output from the shift register 1205, are input
5 to the one AND gate 1304, which outputs 1 if both of the inputs are 1.

The outputs from the NOR gate 1303 and the OR gate 1301 are input to the other AND gate 1305, which also outputs 1 if both of the inputs are 1.

10 The overall operation of the process executed by the detector 1206 thus comprised is described in greater detail below.

As shown in Fig. 13, bit 1 of the shift register output is input through the inverter 1302, while bits 2-16 are
15 input directly, to the NOR gate 1303. As a result, the NOR gate 1303 outputs 1 when bit 1 in the shift register 1205 is 1 and bits 2-16 are all 0. The output from the NOR gate 1303 and bit 17 from the shift register 1205 are input to the AND gate 1304. As a result, the AND gate 1304 outputs 1 only when
20 bits 1 and 17 of the shift register output are 1s, and all bits 2-16 are 0s.

This bit sequence corresponds to the code sequence for the synchronization code identifier expressed by an inversion interval $T_S=16T$ in the NRZI channel signal. An
25 output of 1 from the AND gate 1304 indicates that the synchronization code and other data were correctly read, and is used as the set signal for synchronizing the phase of the

- 58 -

1/15th frequency divider 1207. As a result, a 1 is not output as the set signal when TS=17T due to a $\pm T$ shift in the NRZI channel signal inversion interval TS caused by noise or other factor.

5 Bits 17 and 18 in the shift register output are input to the OR gate 1301. The outputs from the NOR gate 1303 and OR gate 1301 are input to the AND gate 1305. The AND gate 1305 thus outputs 1 if bit 1 is 1, bits 2-16 are all 0, and either bit 17 or 18 is 1 in the shift register output. Thus,
10 a 1 is output as the synchronization code detection signal even when TS=17T due to a $\pm T$ shift in the NRZI channel signal inversion interval TS caused by noise or other factor. In addition, an output of 1 from the AND gate 1305 indicates that
15 even if a slight read error occurs when reading the data containing the synchronization code, the synchronization code was correctly discriminated from the other data, and the read error that occurred is within the correction capacity of the error correction processor. The output from the AND gate 1305 is therefore output to the type information reader 1102 as the
20 synchronization code detection signal.

 The synchronization code identifier can thus be detected even when TS=17T due to a $\pm T$ shift in the NRZI channel signal inversion interval TS caused by noise or other factor, and the synchronization code type information can be
25 read. Furthermore, because it is not possible to detect whether the shift in the inversion position occurred at the rise or fall of the NRZI channel signal corresponding to the

- 59 -

synchronization code identifier when the NRZI channel signal inversion interval $TS=17T$, the synchronization code of which the identifier has an inversion interval TS of $17T$ in the NRZI channel signal is not suited for use detecting the first bit
5 in the code word. It is therefore possible to accurately read the code words of the data in the code word sequence by detecting the first code word bit using only the identifier of a synchronization code in which read error did not occur.

As shown in Fig. 1, according to this embodiment,
10 a sector address SA is provided immediately after each of the synchronization codes $S1$ and $S2$. The sector address SA includes 4-byte address part, 2-byte error correction part and 6-byte attribute part. In each sector address, the address of the block and the address of the sector is stored.
15 Furthermore, at the end of each sector and before the parity portion, 4-byte error detection code EDC is provided for checking the error in the data area.

The reproduction process executed by the optical disk reproduction apparatus 1100 according to the present
20 embodiment of the invention is described in greater detail below with reference to the flow chart thereof in Fig. 14.

The process starts when the reproduction signal of the data and synchronization code recorded to the optical disk as described above are reproduced by the reproduction head of
25 the optical disk reproduction apparatus 1100, and input to the synchronization code discriminator 1101 (step S1401).

The synchronization code discriminator 1101 extracts

- 60 -

an NRZI channel signal from the reproduction signal and demodulates the NRZI channel signal to an NRZ signal (step S1402), discriminates the synchronization code identifier contained in the NRZ signal, i.e., discriminates the signal
5 segment where the signal length TS of the inversion interval of the corresponding NRZI channel signal is $TS \geq 16T$, and outputs the synchronization code detection signal to the type information reader 1102 (step S1403).

The type information reader 1102 decodes the code
10 word read immediately after the synchronization code detection signal is output as the code word part of the synchronization code, and thus discriminates the synchronization code type (step S1404).

If the synchronization code of the identified type
15 is synchronization code S1 (step S1405), it is detected whether the accessed synchronization code S1 is the beginning of the desired block (step S1406) or not. If so, it is detected whether the data in that block from some midpoint therein to the end thereof, i.e., a latter half portion, has
20 already been read (step S1407). If the latter half portion is already read and stored, the read controller 1103 reads the data from the beginning of that block to the sector address SA that has been detected and stored in step S1417 (step S1408), i.e., a first half portion, and inserts the read data
25 in front of the data already read into memory (step S1409). In this manner, the first half portion and the latter half portion of the data are coupled together to form a complete

- 61 -

one block data.

If no latter half portion of the data is read and stored into memory (step S1407), the read controller 1103 reads one complete block of data to just before the next
5 synchronization code S1 (step S1410), and writes the data to memory (step S1411).

The error correction processor 1105 then applies error correction processing to the block of data written to memory (step S1412).

10 The error-corrected data is then sequentially read from memory and output (step S1413).

If the synchronization code of the identified type is not synchronization code S1 (step S1405), and the synchronization code of the identified type is synchronization code
15 S2, that is, if the accessed point is at the synchronization code S2 located at a midpoint of the desired block (step S1414), the read controller 1103 reads the sector address SA following the synchronization code S2 to determine whether the accessed sector is a sector in the desired block (step S1415).

20 If the accessed sector is a sector in the desired block based on the read sector address SA (step S1416), the sector address SA is separately stored (step S1417), the read controller 1103 reads the data from the accessed sector to just before the next synchronization code S1 (step S1418),
25 i.e., a latter half of the block, and writes the data to particular address in memory (step S1419), and then loops back to step S1401.

- 62 -

It is therefore possible by means of the present embodiment to achieve a method for reading from the recording medium data containing a synchronization code that can be accurately and reliably discriminated from the non-synchronization code data, and having various functions. It is therefore possible by means of this reading method to search and accurately read data recorded to an optical disk or other recording medium at high speed, to correct read errors that may occur with a high error correction capability, and output accurate data.

Said recording medium may also be thought of as a transmission path for transmitting to a reproduction apparatus the data and synchronization code recorded by the recording apparatus according to the present invention. It is therefore possible by means of the present embodiment to achieve a reading method for reading from a transmission path data containing a synchronization code that can be accurately and reliably discriminated from the non-synchronization code data, and having various functions, as described in the first embodiment above according to the present invention.

While the DSV is separately tabulated in each data block, it is also possible to tabulate the DSV through a period of plural blocks recorded consecutively to the recording medium by clearing the DSV to zero before the first block in the sequence.

Embodiment 4

A recording medium to which data containing a

- 63 -

synchronization code whereby the position of each frame in a sector can be determined by reading the synchronization code type is described as an alternative embodiment of the invention with reference to Figs. 15 - 17 below.

5 Figs. 15A and 15B show the data structure of the data and synchronization code before modulation for recording to the recording medium according to the present embodiment. Specifically, Fig. 15A shows the data and synchronization code format in the first physical sector of the data block, and
10 Fig. 15B shows the data and synchronization code format in the non-first physical sectors of the data block. Note that each of Figs. 15A and 15B shows a conceptual two-dimensional array of the data in one sector.

The data cum synchronization code is coded,
15 modulated, and written to the optical disk in error correction processing units of one block comprising twelve sectors. Each data frame contains 91 bytes of data converted by 8-15 conversion to 1365 channel bits of data, and each sector comprises thirteen lines of two frames each. A 31-channel bit
20 synchronization code SYS0 - SYS5 is inserted to the beginning of each frame.

Synchronization code SYS0 identifies the sector containing synchronization code SYS0 as the first sector in the block, and each line containing synchronization code SYS0
25 as the first line in that sector.

Synchronization code SYS1 identifies the sector containing synchronization code SYS1 as a sector other than

- 64 -

the first sector in the block, and each line containing synchronization code SYS1 as the first line in that sector.

Synchronization codes SYS0 - SYS5 indicate by the combination of two consecutive types S0 - S5 whether the frame following the synchronization code SYS0 - SYS5 of the second
5 type is the first frame or second frame in the sector.

More specifically, if the numeric part of the references S1 - S5 expressing the synchronization code type are called the "type number," the type number of synchronization code SYS1 is 1, and the type number of synchronization
10 code SYS2 is 2. Note, however, that synchronization code SYS0 is treated as having a type number of 1. As shown in Fig. 15, the synchronization codes SYS0 - SYS5 are assigned such that when the type numbers of any two consecutive frames in a
15 sector add to an odd sum, the frame following the synchronization code containing the second type number is the first frame in the line; when two consecutive type numbers add to an even sum, the frame following the synchronization code containing the second type number is the second frame in the line.

20 Using combinations of three consecutive types S0 - S5, the synchronization codes SYS0 - SYS5 can also be used to identify the position in the sector of the frame following the synchronization code SYS0 - SYS5 of the third type number.

More specifically, the synchronization codes SYS0 -
25 SYS5 are assigned such that any combination of three consecutive type numbers S0 - S5 will not appear twice in the same sector. It is therefore possible to determine the

- 65 -

position of each frame in each sector by storing the position of the frame following the synchronization code SYS0 - SYS5 of the third type number according to the combinations of three consecutive type numbers S0 - S5.

5 Fig. 16 is used to describe the data structure of the synchronization codes SYS0 - SYS5 in this embodiment of the invention. Note that in Fig. 16 "x" represents bits with a code value of either zero (0) or one (1).

10 The synchronization codes SYS0 - SYS5 are 31-bit code sequences. As in the synchronization codes S1 - S4 shown in Fig. 4, an identifier having an inversion interval $T_S = T_{\max} + 2T = 16T$ in the corresponding NRZI channel signal is located from bit 3 to bit 19. The first 21 bits and the last 4 bits of each synchronization code SYS0 - SYS5 are fixed strings common to each synchronization code SYS0 - SYS5. Type information represented by two different patterns are inserted to the six bits from bit 22 to bit 27. Note, also, that in Fig. 15 the first 16 bits of the synchronization codes SYS0 - SYS5 are referred to as the flag part SY, and the last 15 bits are the code word parts S0 - S5.

15 Fig. 17 is another data table showing the type information of the synchronization codes according of the present embodiment, and the read values of the corresponding code words.

25 As described above, it is not possible to determine the location in the block of the frame following any synchronization code using only the one synchronization code SYS0 -

- 66 -

SYS5, and the type information 1 and 2 of the synchronization codes SYS0 - SYS5 therefore simply identify the type (i.e., usage) of the synchronization code.

As shown in the table in Fig. 6, the type information of synchronization codes SYS0 - SYS5 are 6-bit patterns containing an odd (type information 1) or even (type information 2) number of 1s. As in the first embodiment above, type information 1 or 2 is selected to obtain the smallest absolute value of the DSV calculated at the predetermined DSV comparison position in the frame following the synchronization code SYS0 - SYS5, and is inserted to bits 22 - 27 in the bit sequence of the synchronization code SYS0 - SYS5. The code word parts S0 - S5 containing the type information can also be read in the same manner as the other code words after detecting the identifier of the synchronization code SYS0 - SYS5. If the value of the read code word part is, for example, 119 or 138, the synchronization code is known to be synchronization code SYS0. The type of the other synchronization codes SYS1 - SYS5 can be determined in the same way.

In addition to the effects achieved by the first embodiment above, it is therefore possible by means of the present embodiment to determine the position of a given frame within the sector. As a result, if reading starts from some midpoint in any sector in the target block accessed, data can be read immediately into memory from the accessed frame to the end of the last sector in the block, and the remaining data from the beginning of the block to the initially accessed

- 67 -

frame can then be read and written to memory before the previously buffered data, thus enabling all data in the target block to be read in a short time.

It should be noted that the arrangement of the synchronization codes SYS0 - SYS5 shown in Fig. 15 shall not be limited to those shown. Specifically, any arrangement whereby the sum of two consecutive type numbers can identify whether the frame following the second type number is frame 1 or frame 2, and whereby no pattern of three consecutive type numbers appears more than once in any sector, can be used. Calculation methods other than addition may also be used. Furthermore, insofar as no pattern of three consecutive type numbers appears more than once in any sector, patterns of two consecutive type numbers, or patterns of four consecutive type numbers, can be used.

The 6-bit patterns of type information 1 and 2 shall also not be limited to the patterns shown in Fig. 17, and the correlation between synchronization code types S0 - S5 shall also not be limited to those shown in Fig. 17.

The present invention has the following advantageous effects.

It is possible by the present invention to provide a recording medium to which is recorded a code word sequence containing a particular synchronization code whereby the synchronization codes contained in the data written to the recording medium can be identified and frame synchronization can be achieved by detecting the identifier codes identifying

- 68 -

the synchronization codes, and information of which the type is expressed by the synchronization code and which expresses something other than the synchronization code can be obtained by reading the type information code following the identifier code.

It is possible by the first aspect of the present invention to provide a recording medium to which is recorded a code word sequence containing a particular synchronization code whereby the location of the synchronization code in the data block can be known by reading the type information code.

It is possible by the second aspect of the present invention to provide a recording medium to which is recorded a code word sequence containing a particular synchronization code whereby the synchronization code can be discriminated from the code word sequence of non-synchronization codes by means of the particular pattern of the identifier code, the code word formed containing the type information code can be read as one code word of the code word group, and the location of the synchronization code in the data block expressed by that type information code can be known, without requiring a special data structure for reading the type information code, if the information expressed by the type information code, and the information expressed by the code word formed containing said type information code, are recorded with a particular correspondence therebetween.

It is possible by the third aspect of the present invention to provide a recording medium to which is recorded

- 69 -

a code word sequence containing a particular synchronization code whereby the location of the synchronization code in the data block can be known by reading the type information code, and which is selected to achieve the least bias in the dc component of the reproduction signal reproduced from the recording medium of the invention.

It is possible by the fourth aspect of the present invention to provide a recording medium to which is recorded a code word sequence containing a particular synchronization code whereby the frame containing the sector address information can be easily determined by reading the type information code of the synchronization code. It is therefore possible to access a particular block at high speed by simply reading only the type information code of the synchronization code and the address information, and code word sequences containing the synchronization code can be read from some midpoint in the desired block.

It is possible by the fifth aspect of the present invention to provide a recording method for recording to a recording medium a code sequence containing a synchronization code whereby the identifier code identifies the synchronization code from the code word sequences containing non-synchronization code information, and the type information code indicating the synchronization code type is selected according to the synchronization code insertion position and can also be used to express information other than identifying the synchronization codes.

- 70 -

It is possible by the sixth aspect of the present invention to provide a recording method for writing to a recording medium a code word sequence containing a particular synchronization code whereby the synchronization code can be discriminated from the code word sequence of non-synchronization codes by means of the particular pattern of the identifier code, the code word formed containing the type information code can be read as one code word of the code word group, and the location of the synchronization code in the data block expressed by that type information code can be known, without requiring a special data structure for reading the type information code, if the information expressed by the type information code, and the information expressed by the code word formed containing said type information code, are recorded with a particular correspondence therebetween.

It is possible by the seventh aspect of the present invention to provide a recording method for writing to a recording medium a code word sequence containing a particular synchronization code whereby the location of the synchronization code in the data block can be known by reading the type information code, and which is selected to achieve the least bias in the dc component of the reproduction signal reproduced from the recording medium of the invention.

It is possible by the eighth aspect of the present invention to provide a recording method for writing to a recording medium a code word sequence containing a particular synchronization code whereby the frame containing the sector

- 71 -

address information can be easily determined by reading the type information code of the synchronization code. It is therefore possible to access a particular block at high speed by simply reading only the type information code of the synchronization code and the address information, and code word sequences containing the synchronization code can be read from some midpoint in the desired block.

It is possible by the ninth aspect of the present invention to provide a reproduction method for accurately discriminating the synchronization codes, and synchronizing the read clock to the code words, based on a code word sequence containing a particular synchronization code written to a recording medium according to the first aspect. It is also possible to selectively read information recorded immediately following the synchronization code by thus determining the location of information recorded immediately following the synchronization code in the data block.

It is possible by the tenth aspect of the present invention to provide a reproduction method for accurately discriminating the synchronization codes, and synchronizing the read clock to the code words, based on the particular pattern of the identifier code. It is also possible to selectively read information recorded immediately following the synchronization code by reading the code word formed containing the type information code as one code word of the code word group, and determining the location of information recorded immediately following the synchronization code in the

- 72 -

data block.

It is possible by the eleventh aspect of the present invention to provide a reproduction method for easily determining from the data recorded to a recording medium according to the fourth aspect the frames containing address information based on the type information codes of the synchronization codes. It is therefore possible to access a particular block at high speed by simply reading only the type information code of the synchronization code and the address information, and code word sequences containing the synchronization code can be read from some midpoint in the desired block.

The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.

CLAIMS

1. An article of manufacture comprising:
a reproducer usable recording medium having a reproducer
readable channel signal embodied therein, said reproducer
5 readable channel signal in said article of manufacture
comprising:
synchronization codes provided along a track with
an interval between two synchronization codes; and
data codes filled in said interval between two
10 synchronization codes, said data codes comprising a sequence
of code words;
said synchronization code comprising an identifier
having a particular pattern distinguishable from any data in
said data codes, and a type information code representing a
15 type of synchronization code;
said channel signal generated in a sequence of said
synchronization codes and said data codes.
2. An article of manufacture according to Claim 1,
wherein said type information code is a code specifying a
20 location of the corresponding synchronization code in a data
block.
3. An article of manufacture according to Claim 2,
wherein said type information code has such a pattern that a
code pattern of a code segment starting from a particular

- 74 -

position in the identifier code and including the type information code is identical to a code pattern of one of the code words.

4. An article of manufacture according to Claim 2, wherein said type information code is the type information code selected from a plurality of type information codes expressing the same type but resulting in the smallest bias in the dc component of the channel signal before and after the synchronization code.

10 5. An article of manufacture according to Claim 2, wherein: said data block is divided into a plurality of sectors, each sector having a plurality of frames; a sector address is provided in a particular frame in each sector; and a type information code identifying the frame containing the
15 sector address is contained in the synchronization code inserted before the frame containing the sector address.

6. A recording method for recording a sequence of code words to a recording medium, a plurality of code words forming a frame, a plurality of frames forming a data block, said
20 method comprising the steps of:

(a) inserting synchronization codes at a beginning of and at preselected places in said data block;

(b) adding an identifier code to each said synchronization code for discriminating the synchronization code from

- 75 -

other codes in the data block;

(c) adding a type information code to each said synchronization code for indicating a type of synchronization code based on the position in the block where the synchronization code is insertion;

(d) generating a channel signal from the data blocks to which the synchronization codes have been inserted; and

(e) recording the channel signal.

7. A recording method according to Claim 6, wherein said step (b) comprises the steps of (b1) generating said identifier code having a code pattern different from any code pattern of said code words, and wherein said step (c) comprises the step of (c1) generating said type information code such that a code pattern of a code segment starting from a particular position in the identifier code and including the type information code is identical to a code pattern of one of the code words.

8. A recording method according to Claim 6, wherein said type information code is the type information code selected from a plurality of type information codes expressing the same type but resulting in the smallest bias in the dc component of the channel signal before and after the synchronization code.

9. A recording method according to Claim 6, wherein

- 75 -

said data block is divided into a plurality of sectors, each sector having a plurality of frames; a sector address is provided in a particular frame in each sector; and a type information code identifying the frame containing the sector
5 address is contained in the synchronization code inserted before the frame containing the sector address.

10. A recording apparatus for recording a channel signal generated in a sequence of code words to a recording medium, a plurality of code words forming a frame, a plurality of
10 frames forming a data block, said apparatus comprising:

inserting means for inserting synchronization codes at a beginning of and at preselected places in said data block;

first adding means for adding an identifier code to
15 each said synchronization code for discriminating the synchronization code from other codes in the data block;

second adding means for adding a type information code to each said synchronization code for indicating a type of synchronization code based on the position in the block
20 where the synchronization code is insertion; and

outputting means for outputting the channel signal generated in the data blocks to which the synchronization codes have been inserted for recording to said recording medium.

25 11. A recording apparatus according to Claim 10, wherein

- 77 -

said first adding means comprises generating means for generating said identifier code having a code pattern different from any code pattern of said code words, and wherein said second adding means comprises generating means
5 for generating said type information code such that a code pattern of a code segment starting from a particular position in the identifier code and including the type information code is identical to a code pattern of one of the code words.

12. A recording apparatus according to Claim 10, wherein
10 said type information code is the type information code selected from a plurality of type information codes expressing the same type but resulting in the smallest bias in the dc component of the channel signal before and after the synchronization code.

13. A recording apparatus according to Claim 10, wherein
15 said data block is divided into a plurality of sectors, each sector having a plurality of frames; a sector address is provided in a particular frame in each sector; and a type information code identifying the frame containing the sector
20 address is contained in the synchronization code inserted before the frame containing the sector address.

14. A reproduction method for reproducing information from a recording medium storing synchronization codes provided along a track with an interval between two synchronization

- 78 -

codes, and data codes filled in said interval between two synchronization codes, said data codes comprising a sequence of code words; said synchronization code comprising an identifier having a particular pattern distinguishable from any data in said data codes, and a type information code specifying a location of the corresponding synchronization code in a data block, said method comprising the steps of:

- (a) detecting said synchronization code by detecting said identifier; and
- 10 (b) reading said type information code in said synchronization code to specify the location of said synchronization code and eventually specifying the data codes following said synchronization code in the data block.

15. A reproduction method according to claim 14, wherein
15 said type information code is arranged such that a code pattern of a code segment starting from a particular position in the identifier code and including the type information code is identical to a code pattern of one of the code words, and wherein said step (b) reads a code word pattern.

20 16. A reproduction method according to claim 14, wherein said data block is divided into a plurality of sectors, each sector having a plurality of frames; a sector address is provided in a particular frame in each sector; and the type information code identifying the frame containing the sector
25 address is contained in the synchronization code inserted

- 79 -

before the frame containing the sector address, and said method further comprising the step of reading the sector address.

17. A reproduction apparatus for reproducing information from a recording medium storing synchronization codes provided along a track with an interval between two synchronization codes, and data codes filled in said interval between two synchronization codes, said data codes comprising a sequence of code words; said synchronization code comprising an identifier having a particular pattern distinguishable from any data in said data codes, and a type information code specifying a location of the corresponding synchronization code in a data block, said apparatus comprising:

detecting means for detecting said synchronization code by detecting said identifier; and

reading means for reading said type information code in said synchronization code to specify the location of said synchronization code and eventually specifying the data codes following said synchronization code in the data block.

18. A reproduction apparatus according to claim 17, wherein said type information code is arranged such that a code pattern of a code segment starting from a particular position in the identifier code and including the type information code is identical to a code pattern of one of the code words, and wherein said reading means reads a code word

- 80 -

pattern.

19. A reproduction apparatus according to claim 17, wherein said data block is divided into a plurality of sectors, each sector having a plurality of frames; a sector address is provided in a particular frame in each sector; and
5 the type information code identifying the frame containing the sector address is contained in the synchronization code inserted before the frame containing the sector address, and said apparatus further comprising means for reading the sector
10 address.

Fig. 1

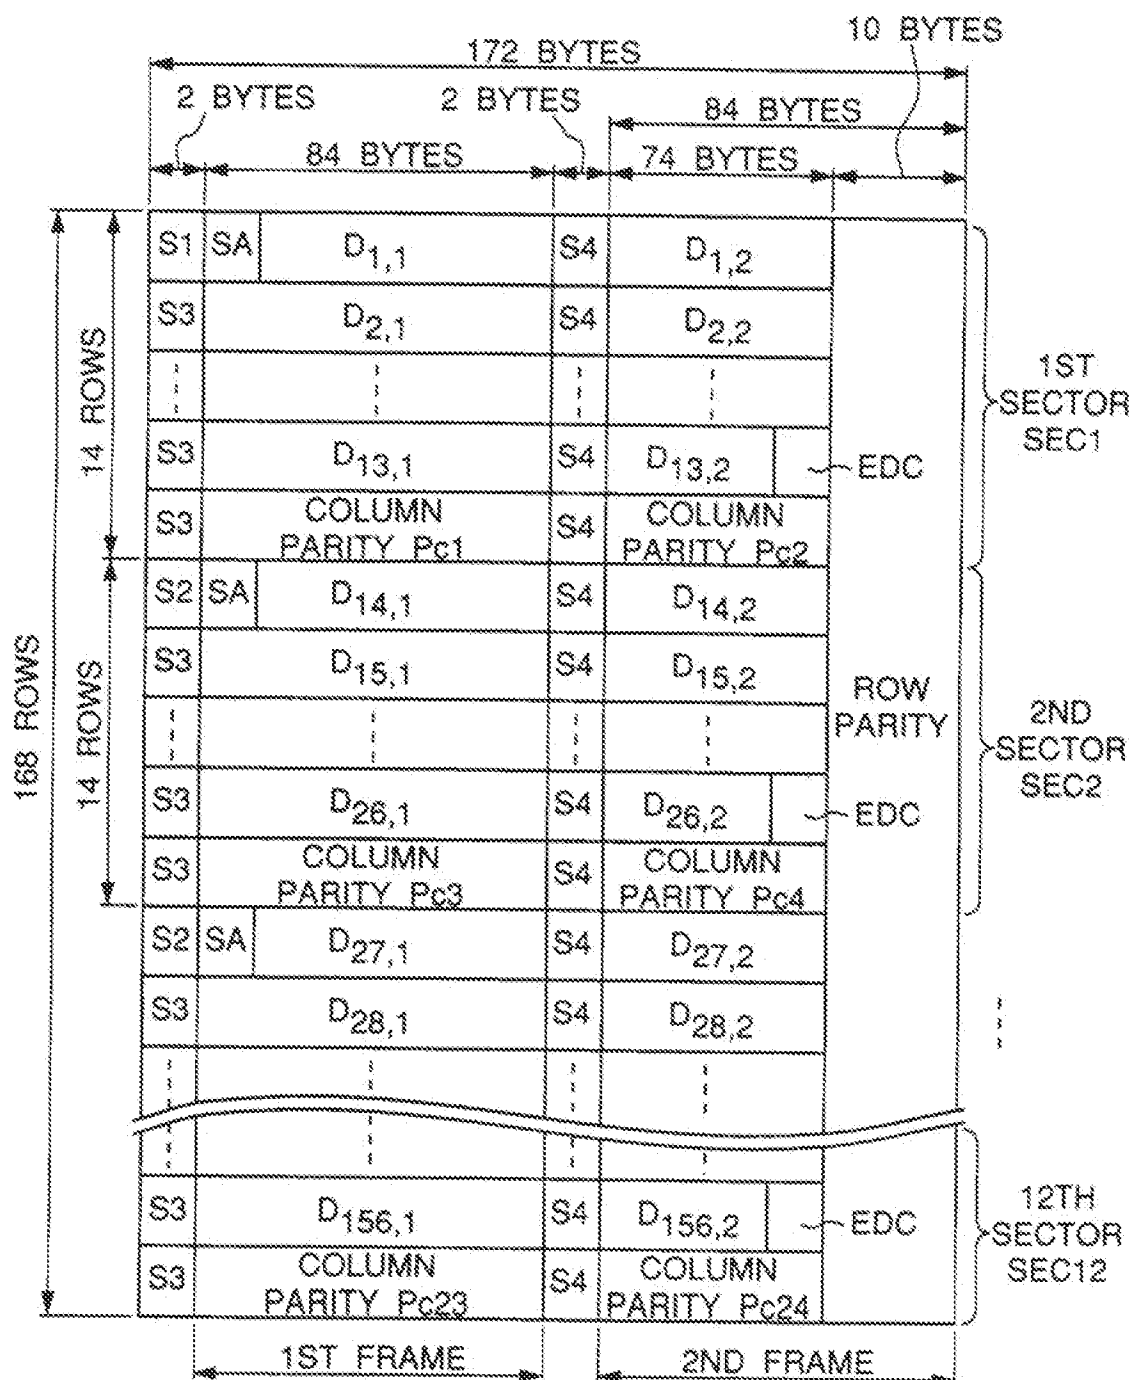


Fig.2

8 / 15 CONVERSION TABLE

DATA WORD	CODE WORD	DATA WORD	CODE WORD	DATA WORD	CODE WORD
0	000000000100001	50	000010000000010	100	000100010010000
1	000000000100010	51	0000100000000100	101	000100010010001
2	000000000100100	52	0000100000001000	102	000100010010010
3	000000000100000	53	0000100000001001	103	000100100000000
4	0000000001000001	54	0000100000010000	104	000100100000001
5	0000000001000010	55	0000100000010001	105	000100100100010
6	0000000001000100	56	0000100000010010	106	000100100000100
7	0000000001001000	57	0000100000010000	107	000100100001000
8	0000000001001001	58	0000100000010001	108	000100100001001
9	0000000001000000	59	0000100000010010	109	000100100010000
10	0000000001000001	60	00001000000100100	110	000100100010001
11	00000000010000010	61	00001000000100000	111	000100100010010
12	00000000010000100	62	00001000000100001	112	000100100100000
13	00000000010001000	63	00001000000100010	113	000100100100001
14	00000000010001001	64	000010000001000100	114	000100100100010
15	00000000010010000	65	000010000001001000	115	000100100100100
16	00000000010010001	66	000010000001001001	116	001000000000010
17	00000000010010010	67	0000100100000000	117	001000000000100
18	00000000010000000	68	0000100100000001	118	0010000000001000
19	000000000100000001	69	0000100100000010	119	0010000000001001
20	000000000100000010	70	0000100100000100	120	0010000000010000
21	0000000001000000100	71	0000100100001000	121	0010000000010001
22	000000000100001000	72	0000100100001001	122	0010000000010010
23	000000000100001001	73	0000100100010000	123	0010000000010000
24	000000000100010000	74	0000100100010001	124	0010000000010001
25	000000000100010001	75	0000100100010010	125	0010000000010010
26	000000000100010010	76	0001000000000001	126	00100000000100100
27	00000000010000000	77	0001000000000010	127	00100000000100000
28	00000000010000001	78	00010000000000100	128	00100000000100001
29	00000000010000010	79	00010000000001000	129	00100000000100010
30	000000000100000100	80	00010000000001001	130	001000000001000100
31	00000000000000001	81	00010000000001000	131	00100000000100000
32	000000000000000010	82	00010000000001001	132	00100000000100010
33	000000000000000100	83	000100000000010010	133	00100000000100000
34	0000000000000001000	84	00010000000000000	134	00100000000000001
35	0000000000000001001	85	00010000000000001	135	00100000000000010
36	0000000000000001000	86	00010000000000010	136	001000000000000100
37	0000000000000001001	87	000100000000000100	137	0010000000000001000
38	00000000000000010010	88	00010000000000000	138	0010000000000001001
39	00000000000000000	89	00010000000000001	139	00100000000000000
40	00000000000000001	90	00010000000000010	140	00100000000000001
41	00000000000000010	91	000100000000000100	141	00100000000000010
42	000000000000000100	92	0001000000000001000	142	00100000000000000
43	00000000000000000	93	0001000000000001001	143	00100000000000001
44	00000000000000001	94	00010000000000000	144	00100000000000010
45	00000000000000010	95	00010000000000001	145	001000000000000100
46	000000000000000100	96	00010000000000010	146	0010000000000001000
47	0000000000000001000	97	000100000000000100	147	0010000000000001001
48	0000000000000001001	98	0001000000000001000	148	00100000000000000
49	00001000000000001	99	0001000000000001001	149	00100000000000001

3/20

Fig.3

8 / 15 CONVERSION TABLE

DATA WORD	CODE WORD	DATA WORD	CODE WORD	DATA WORD	CODE WORD
150	001000100010010	100	0100001000000010	250	010010010000100
151	001000100100000	201	010000100000100	251	010010010001000
152	001000100100001	202	010000100001000	252	010010010001011
153	001000100100010	203	010000100001001	253	010010010010000
154	001000100100100	204	010000100010000	254	010010010010001
155	001001000000001	205	010000100010001	255	010010010010010
156	001001000000010	206	010000100010010		
157	001001000000100	207	010000100100000		
158	001001000001000	208	010000100100001		
159	001001000001001	209	010000100100010		
160	001001000010000	210	010000100100100		
161	001001000010001	211	010001000000001		
162	001001000010010	212	010001000000010		
163	001001000100000	213	010001000000100		
164	001001000100001	214	010001000001000		
165	001001000100010	215	010001000001001		
166	001001000100100	216	010001000010000		
167	001001001000000	217	010001000010001		
168	001001001000001	218	010001000010010		
169	001001001000010	219	010001000100000		
170	001001001000100	220	010001000100001		
171	001001001001000	221	010001000100010		
172	001001001001001	222	010001000100100		
173	010000000000100	223	010001001000000		
174	010000000001000	224	010001001000001		
175	010000000001001	225	010001001000010		
176	010000000010000	226	010001001000100		
177	010000000010001	227	010001001001000		
178	010000000010010	228	010001001001001		
179	010000000100000	229	010010000000001		
180	010000000100001	230	010010000000010		
181	010000000100010	231	010010000000100		
182	010000000100100	232	010010000001000		
183	010000001000000	233	010010000001001		
184	010000001000001	234	010010000010000		
185	010000001000010	235	010010000010001		
186	010000001000100	236	010010000010010		
187	010000001001000	237	010010000100000		
188	010000001001001	238	010010000100001		
189	010000010000000	239	010010000100010		
190	010000010000001	240	010010000100100		
191	010000010000010	241	010010001000000		
192	010000010000100	242	010010001000001		
193	010000010001000	243	010010001000010		
194	010000010001001	244	010010001000100		
195	010000010010000	245	010010001001000		
196	010000010010001	246	010010001001001		
197	010000010010010	247	010010010000000		
198	010000100000000	248	010010010000001		
199	010000100000001	249	010010010000010		

Fig. 4

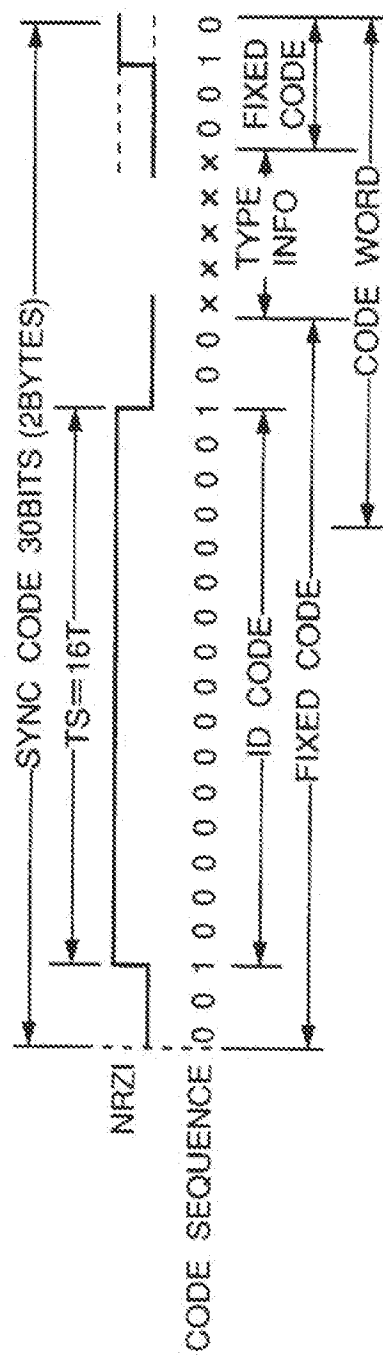


Fig.5


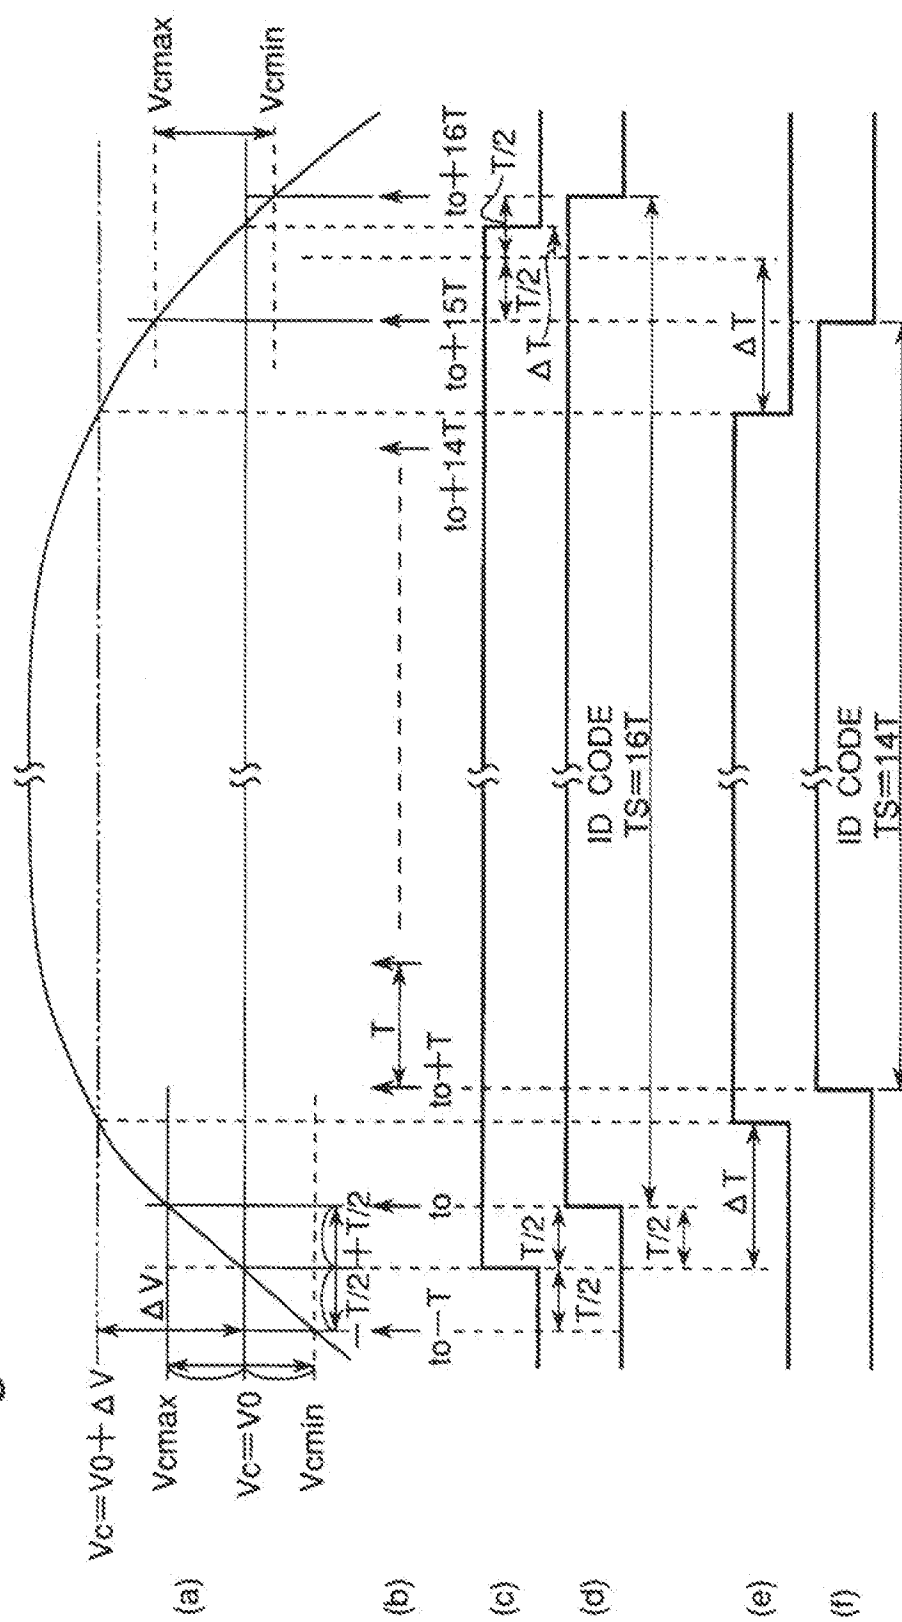


Fig.6


	TYPE INFO 1	CODE WORD	TYPE INFO 2	CODE WORD
SYNC CODE S1	10010	114	00010	86
SYNC CODE S2	01001	102	01000	96
SYNC CODE S3	10001	111	10000	105
SYNC CODE S4	00000	77	00001	83

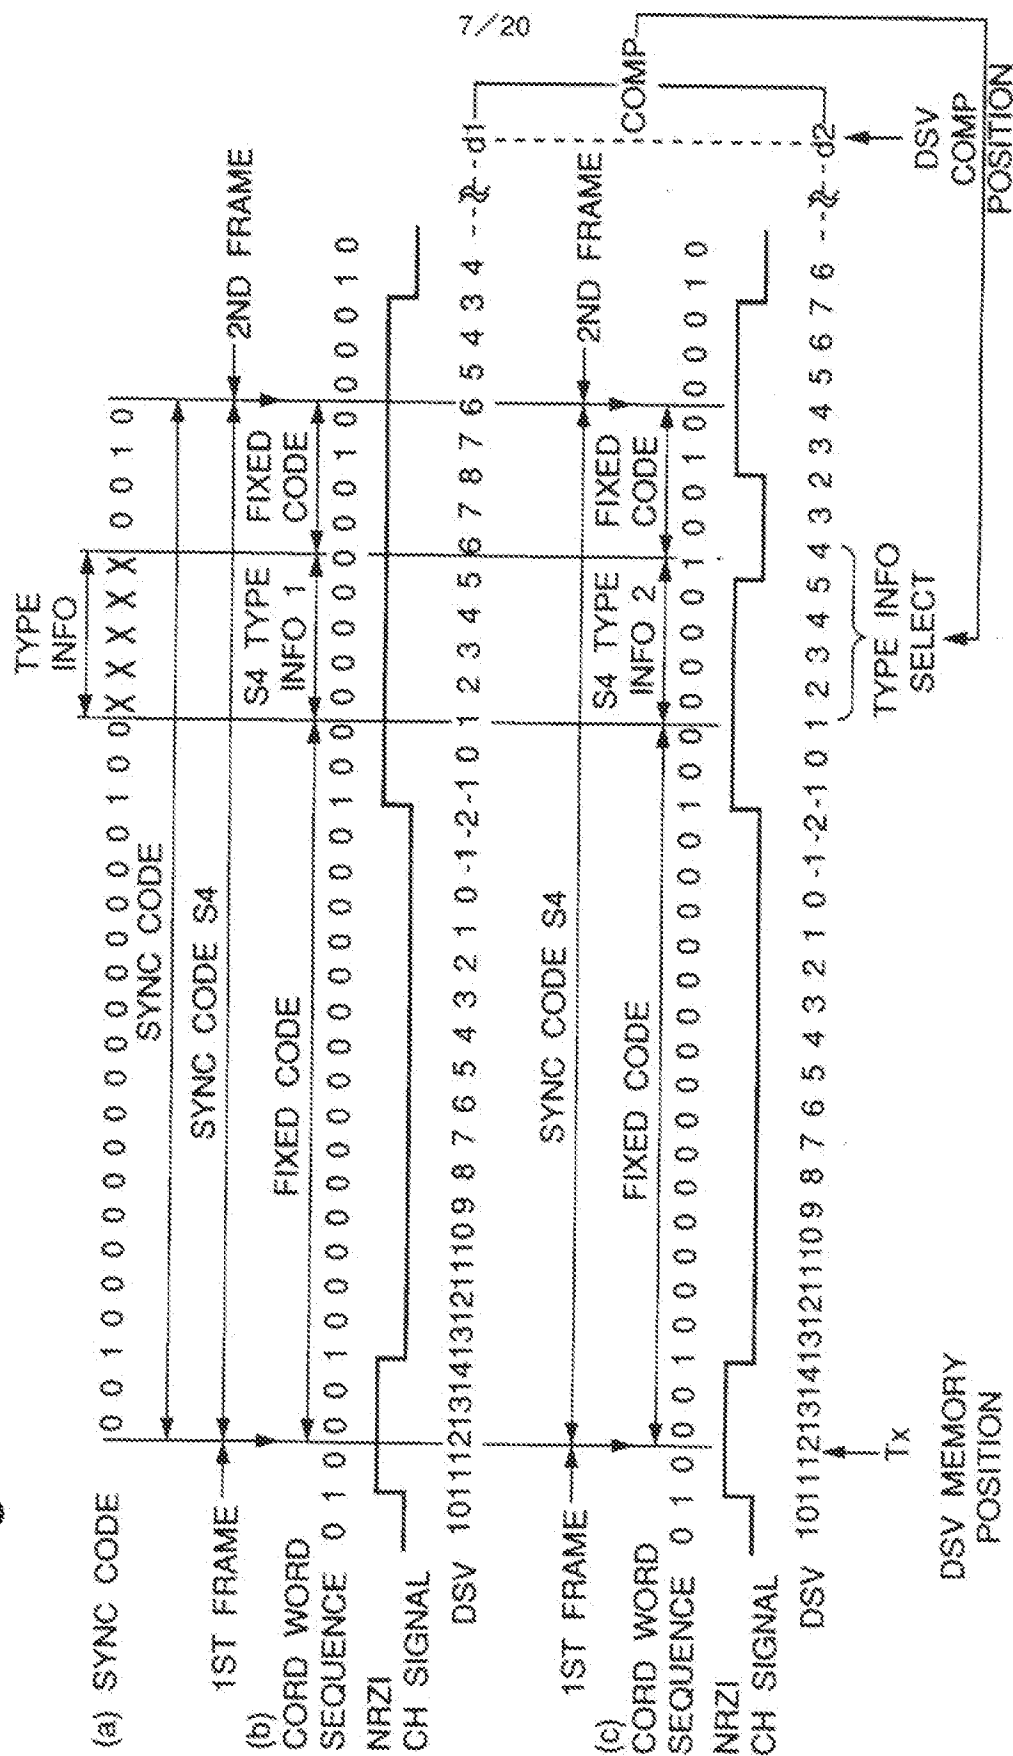Fig.7



8/20

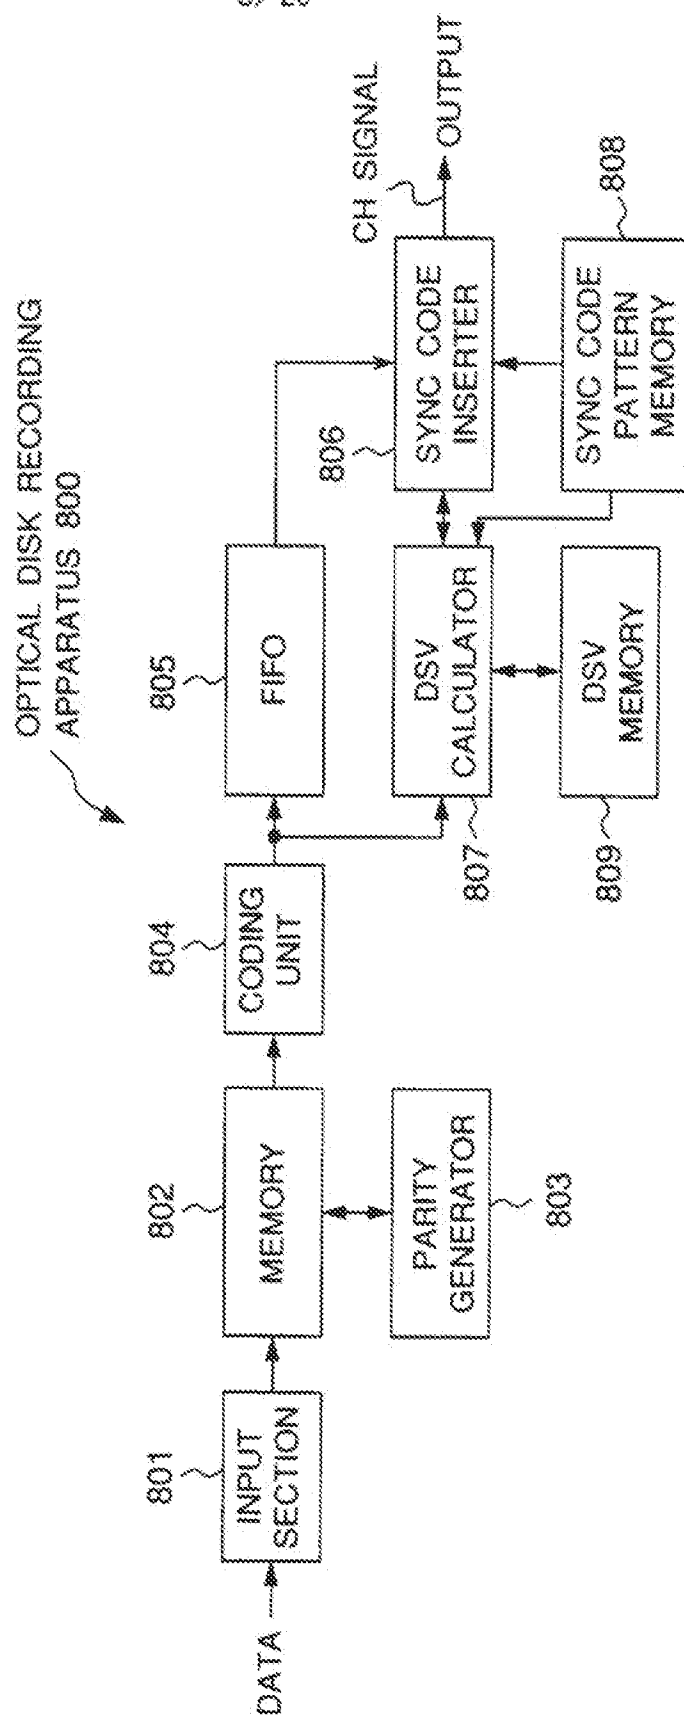Fig.8



9/20

Fig.9



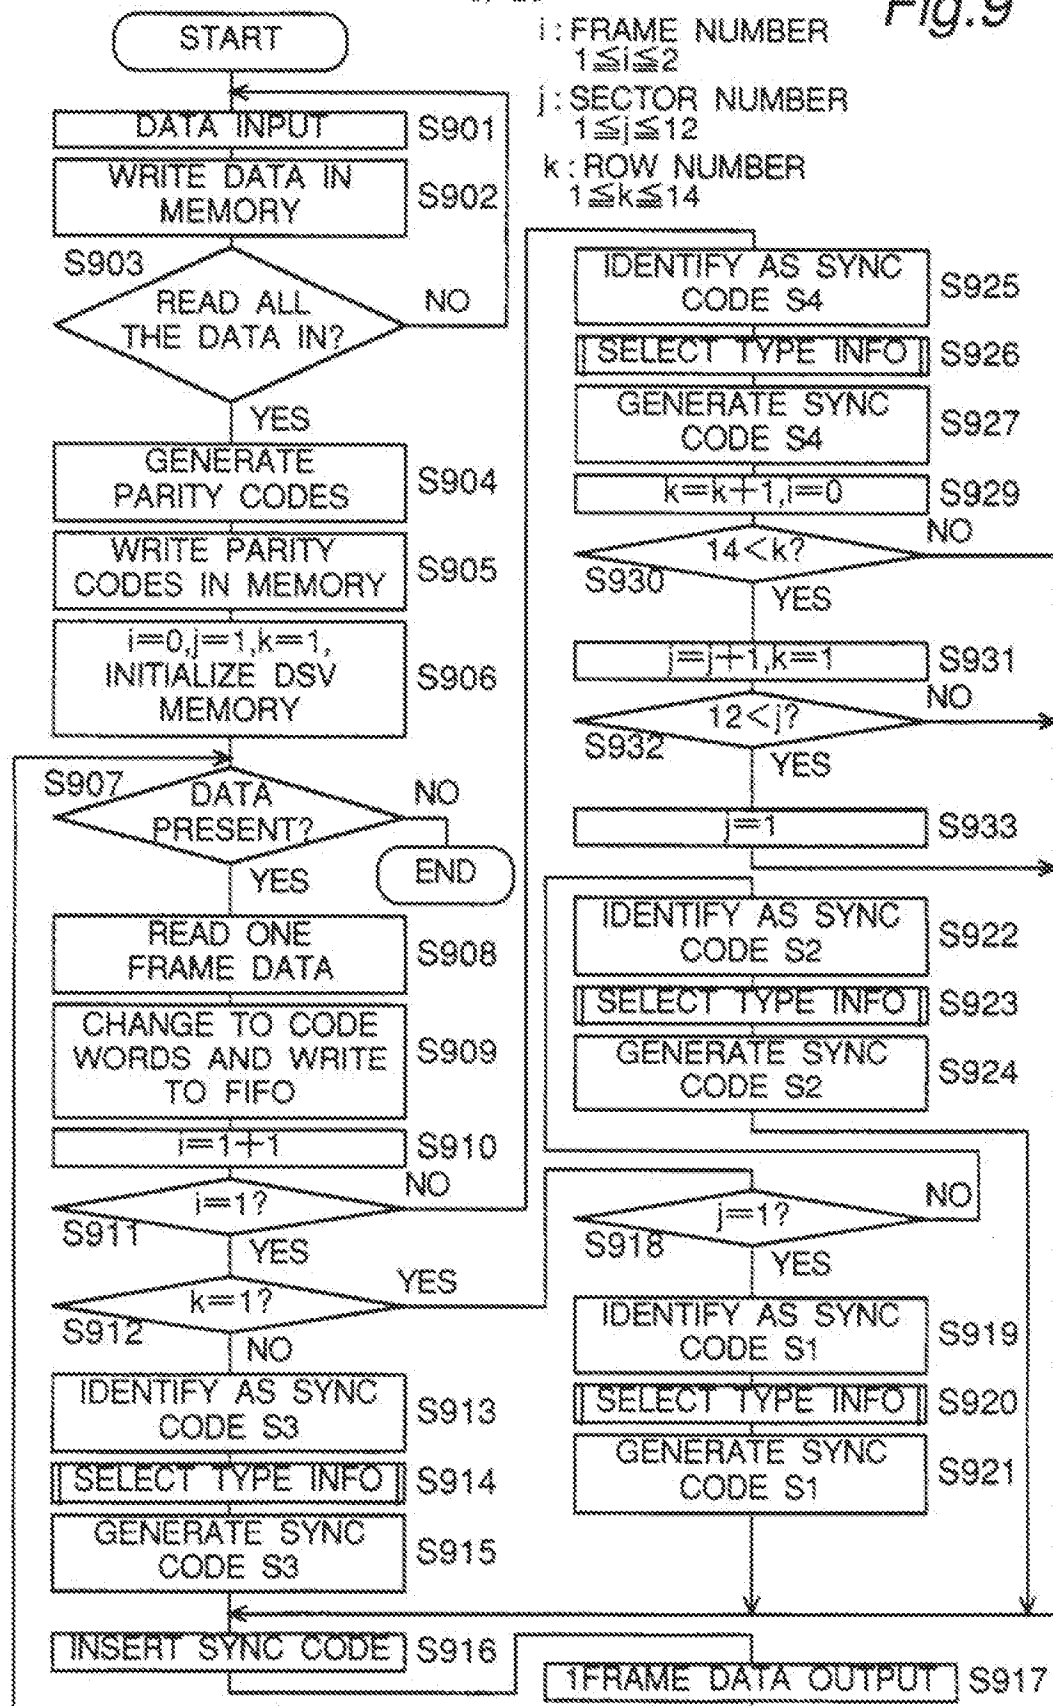


Fig. 10

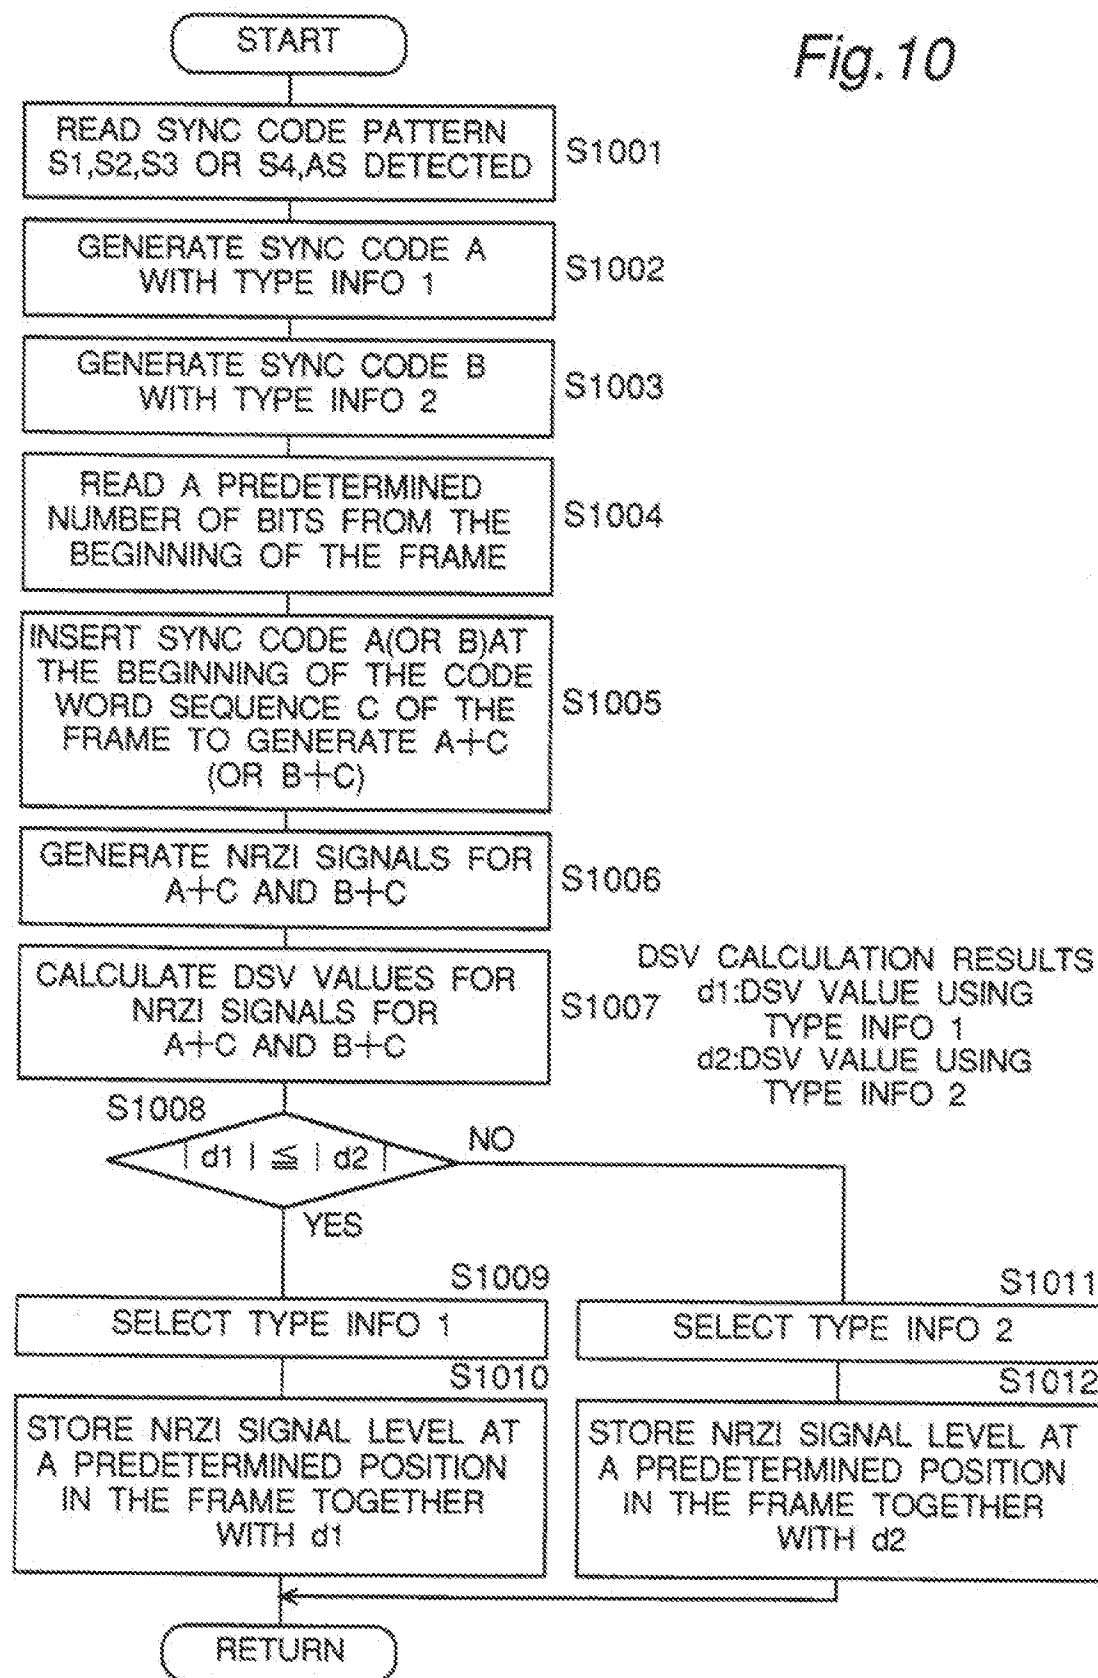

11/20

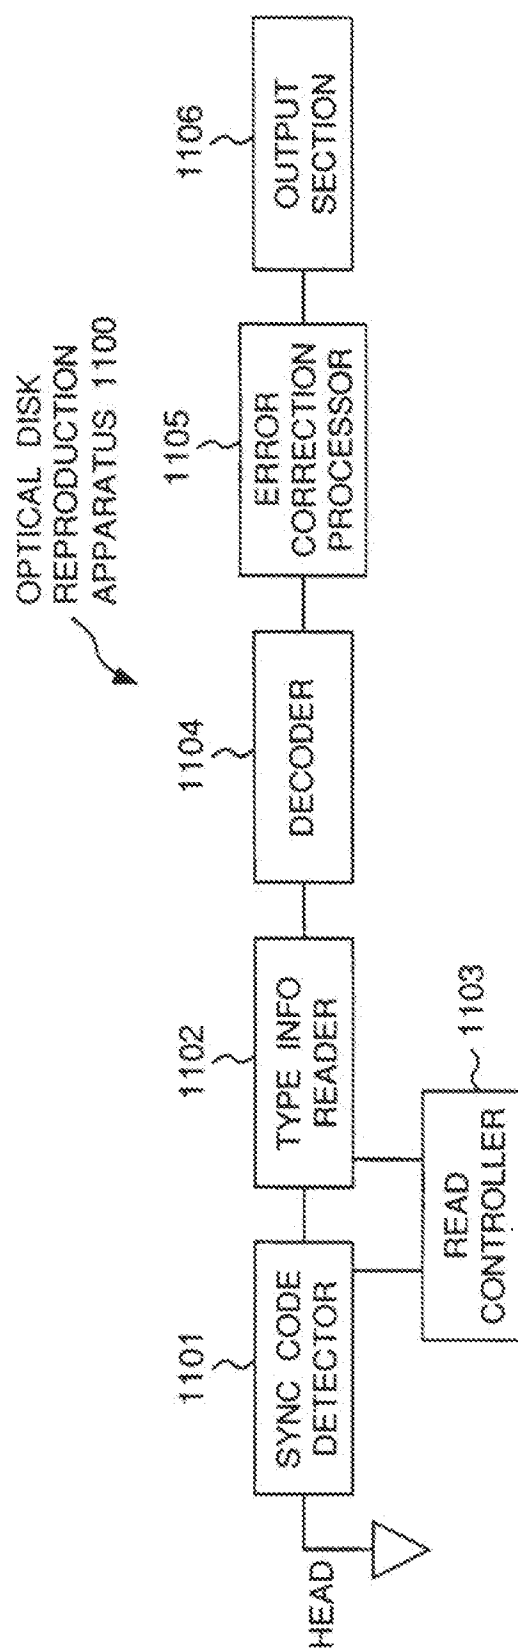Fig. 11



12/20

Fig. 12


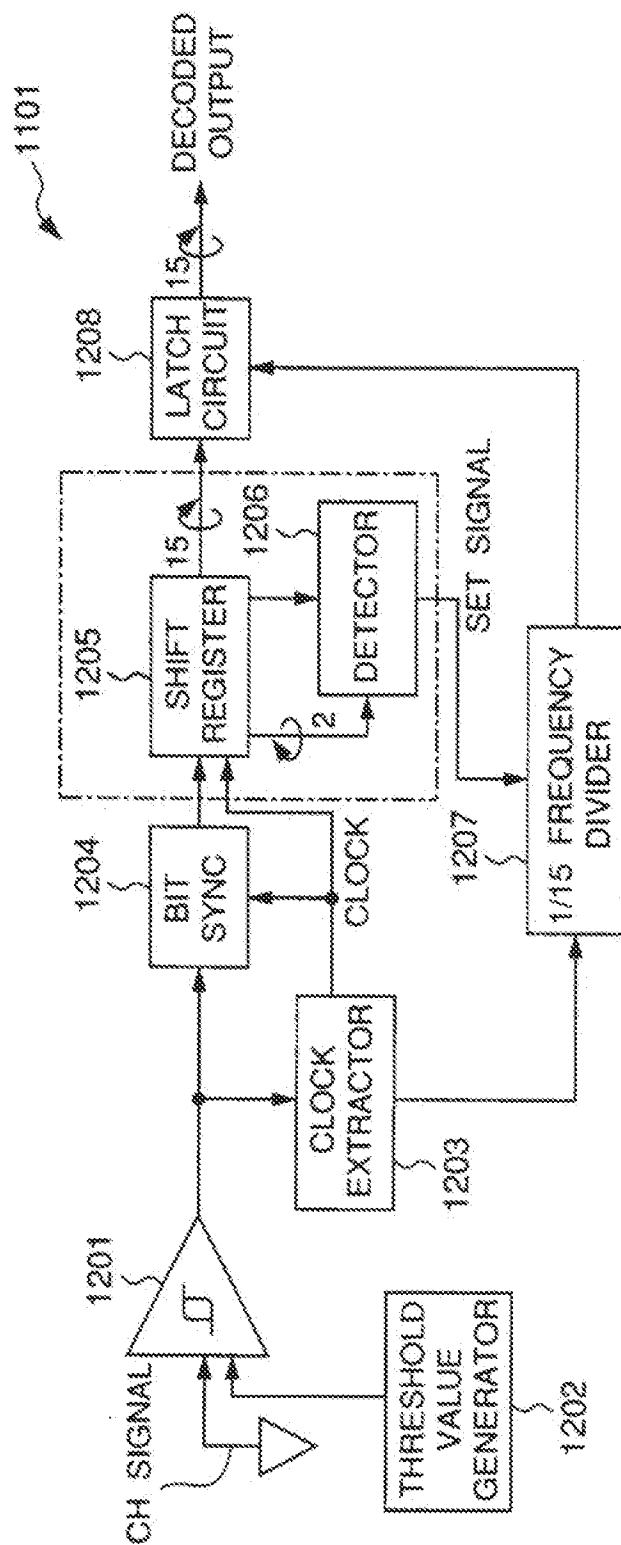


Fig. 13

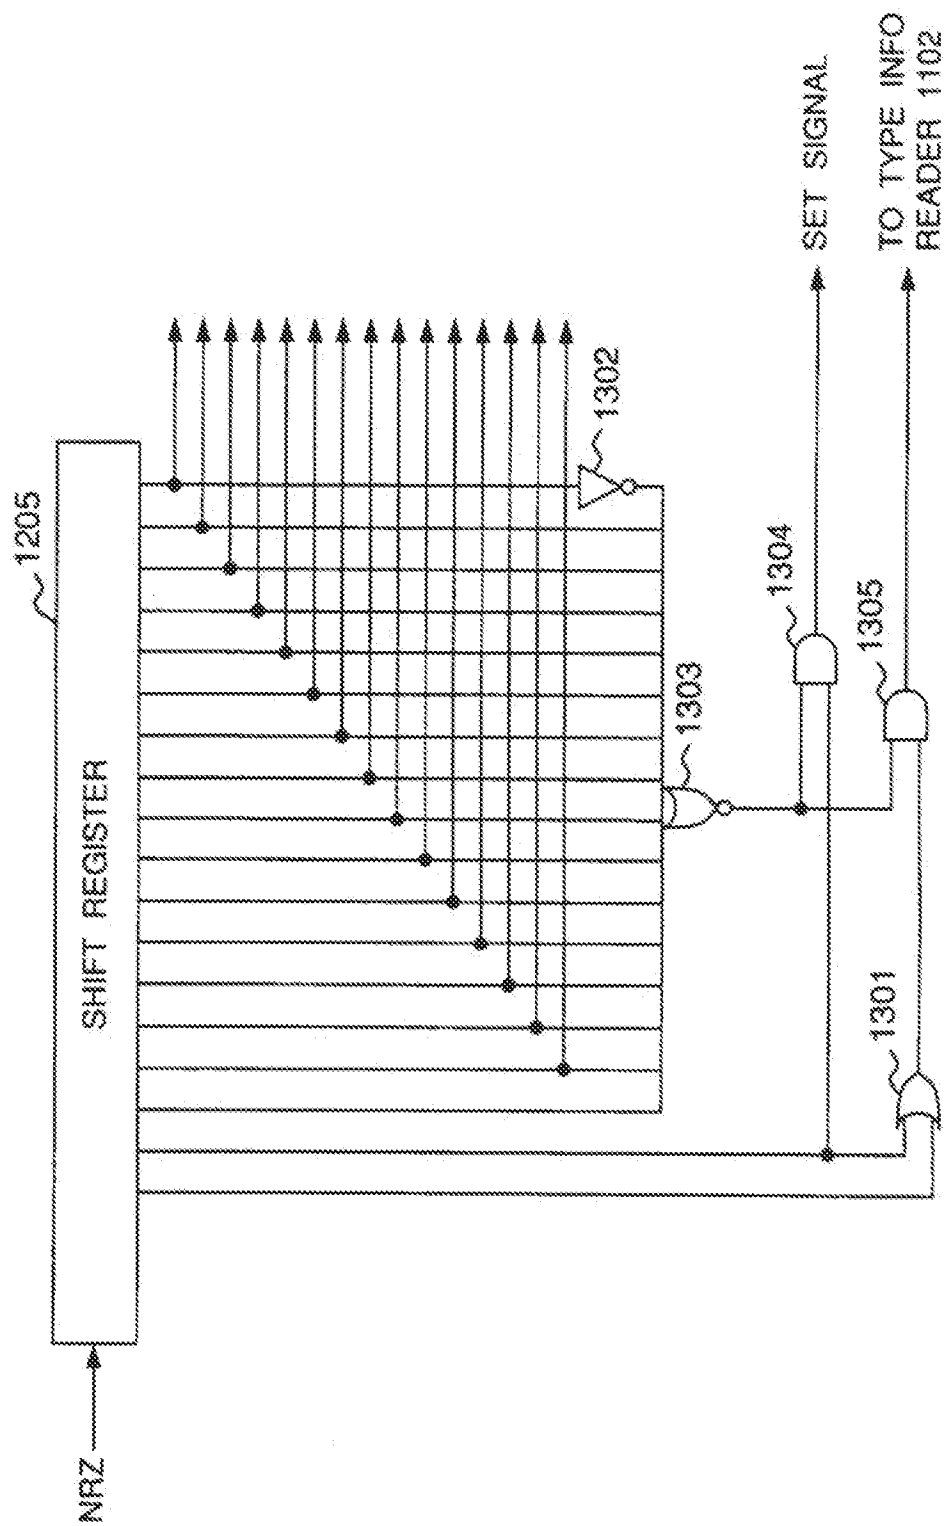

14/20

Fig.14

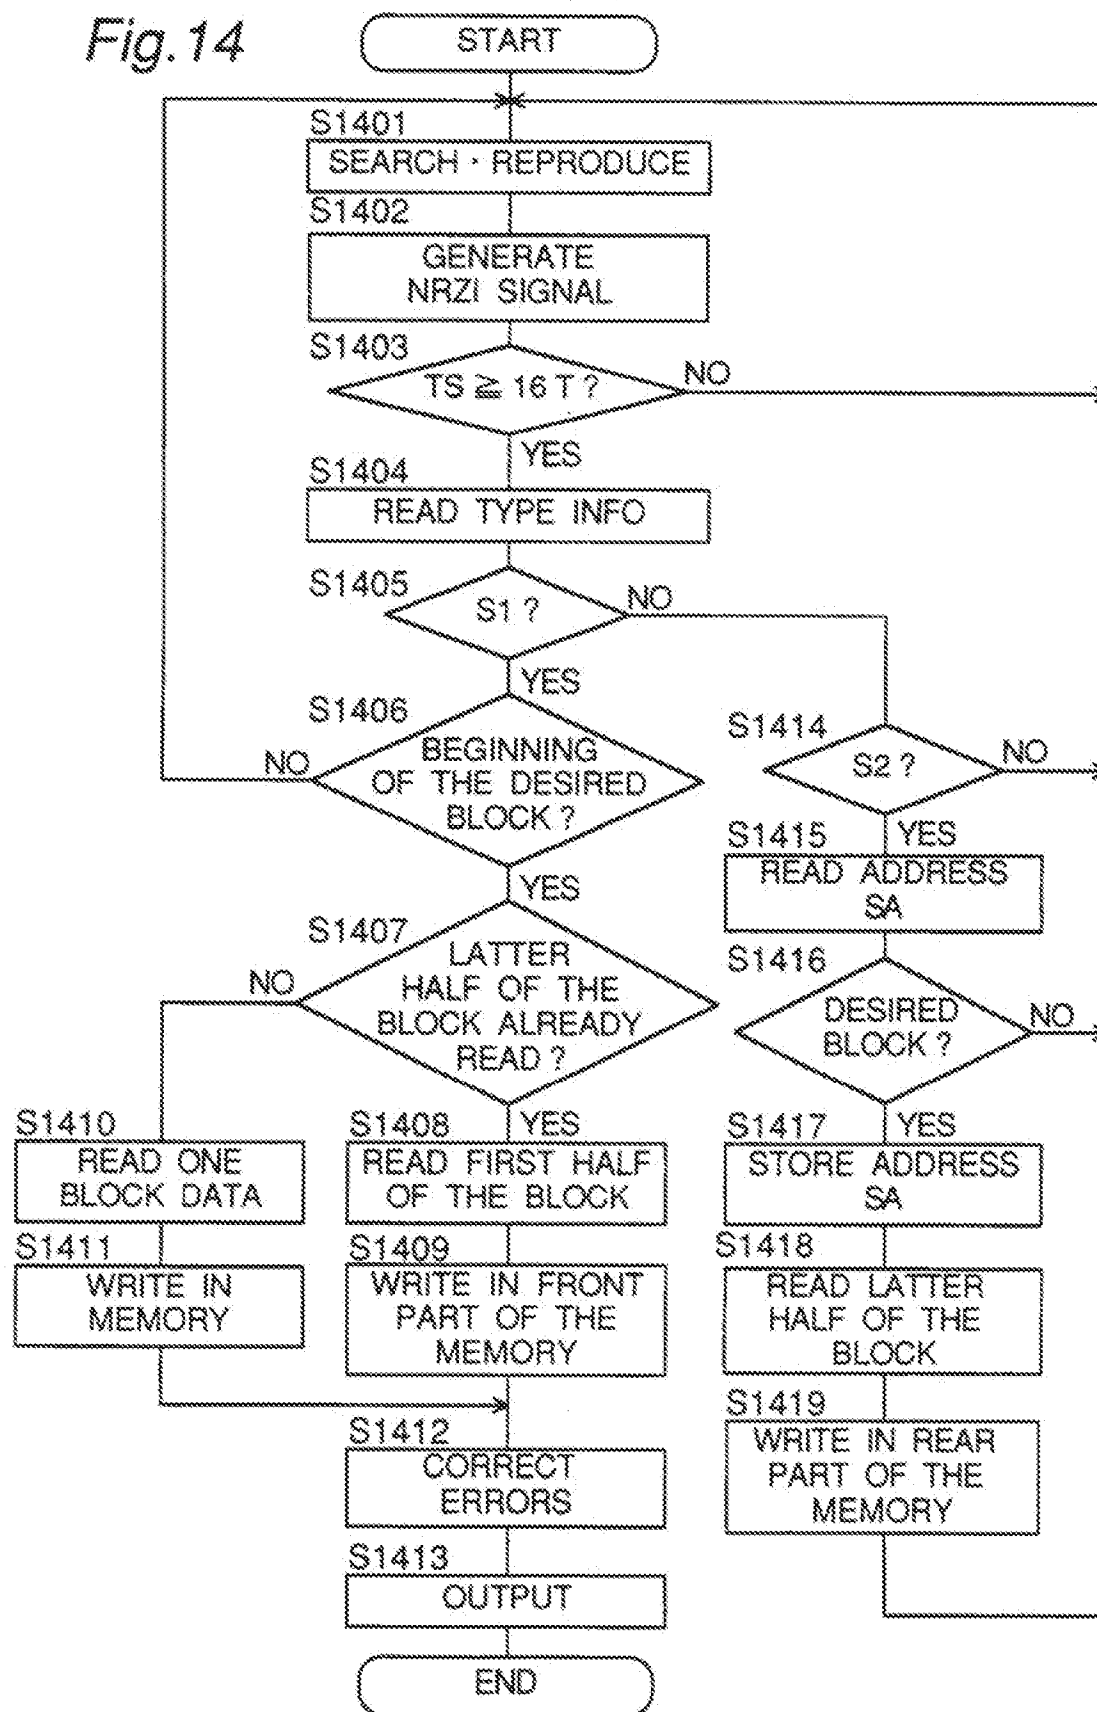


Fig. 15A

	16	15	1365		16	15	1365	
13 LINS	SY	S0			SY	S0		
	SY	S2			SY	S2		
	SY	S3			SY	S5		
	SY	S4			SY	S4		
	SY	S5			SY	S3		
	SY	S4			SY	S2		
	SY	S5			SY	S3		
	SY	S2			SY	S4		
	SY	S3			SY	S5		
	SY	S2			SY	S4		
	SY	S5			SY	S5		
	SY	S4			SY	S2		
	SY	S3			SY	S3		

Fig. 15B

	16	15	1365		16	15	1365	
13 LINS	SY	S1			SY	S1		
	SY	S2			SY	S2		
	SY	S3			SY	S5		
	SY	S4			SY	S4		
	SY	S5			SY	S3		
	SY	S4			SY	S2		
	SY	S5			SY	S3		
	SY	S2			SY	S4		
	SY	S3			SY	S5		
	SY	S2			SY	S4		
	SY	S5			SY	S5		
	SY	S4			SY	S2		
	SY	S3			SY	S3		

Fig.16

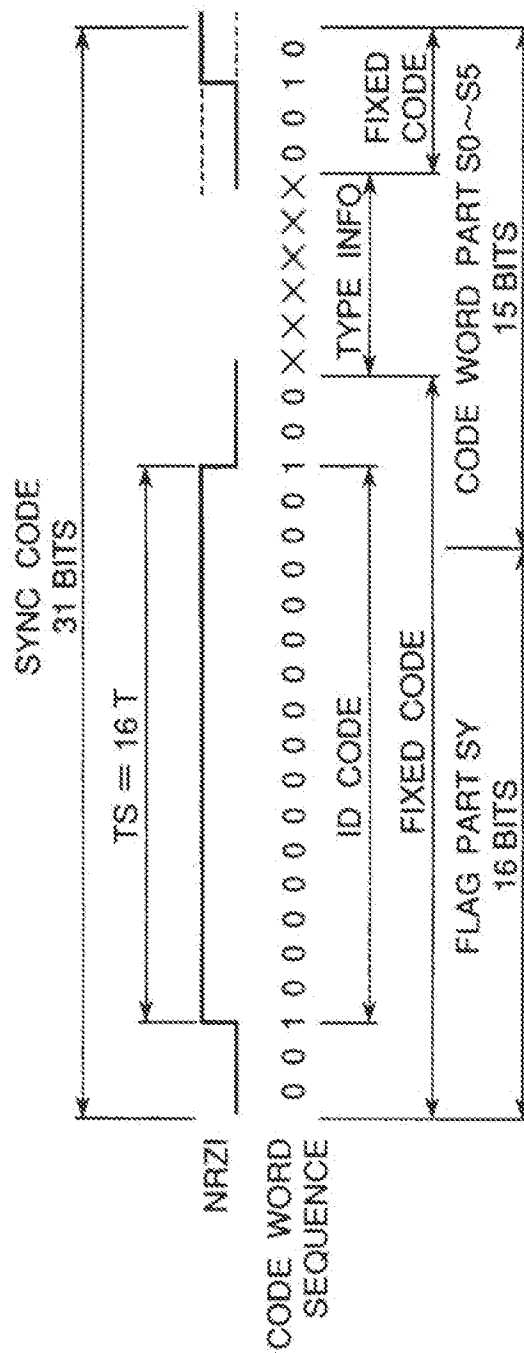


Fig.17

	TYPE INFO 1	CODE WORD	TYPE INFO 2	CODE WORD
SYNC CODE S0	0 0 0 0 0	119	0 0 0 1 0 0	138
SYNC CODE S1	1 0 0 0 0	125	1 0 0 1 0 0	144
SYNC CODE S2	0 1 0 0 0	128	0 1 0 0 1 0	155
SYNC CODE S3	0 0 1 0 0	132	0 0 1 0 0 1	171
SYNC CODE S4	0 0 0 0 1 0	146	1 0 0 0 1 0	152
SYNC CODE S5	0 0 0 0 0 1	158	1 0 0 0 0 1	164

Fig.18

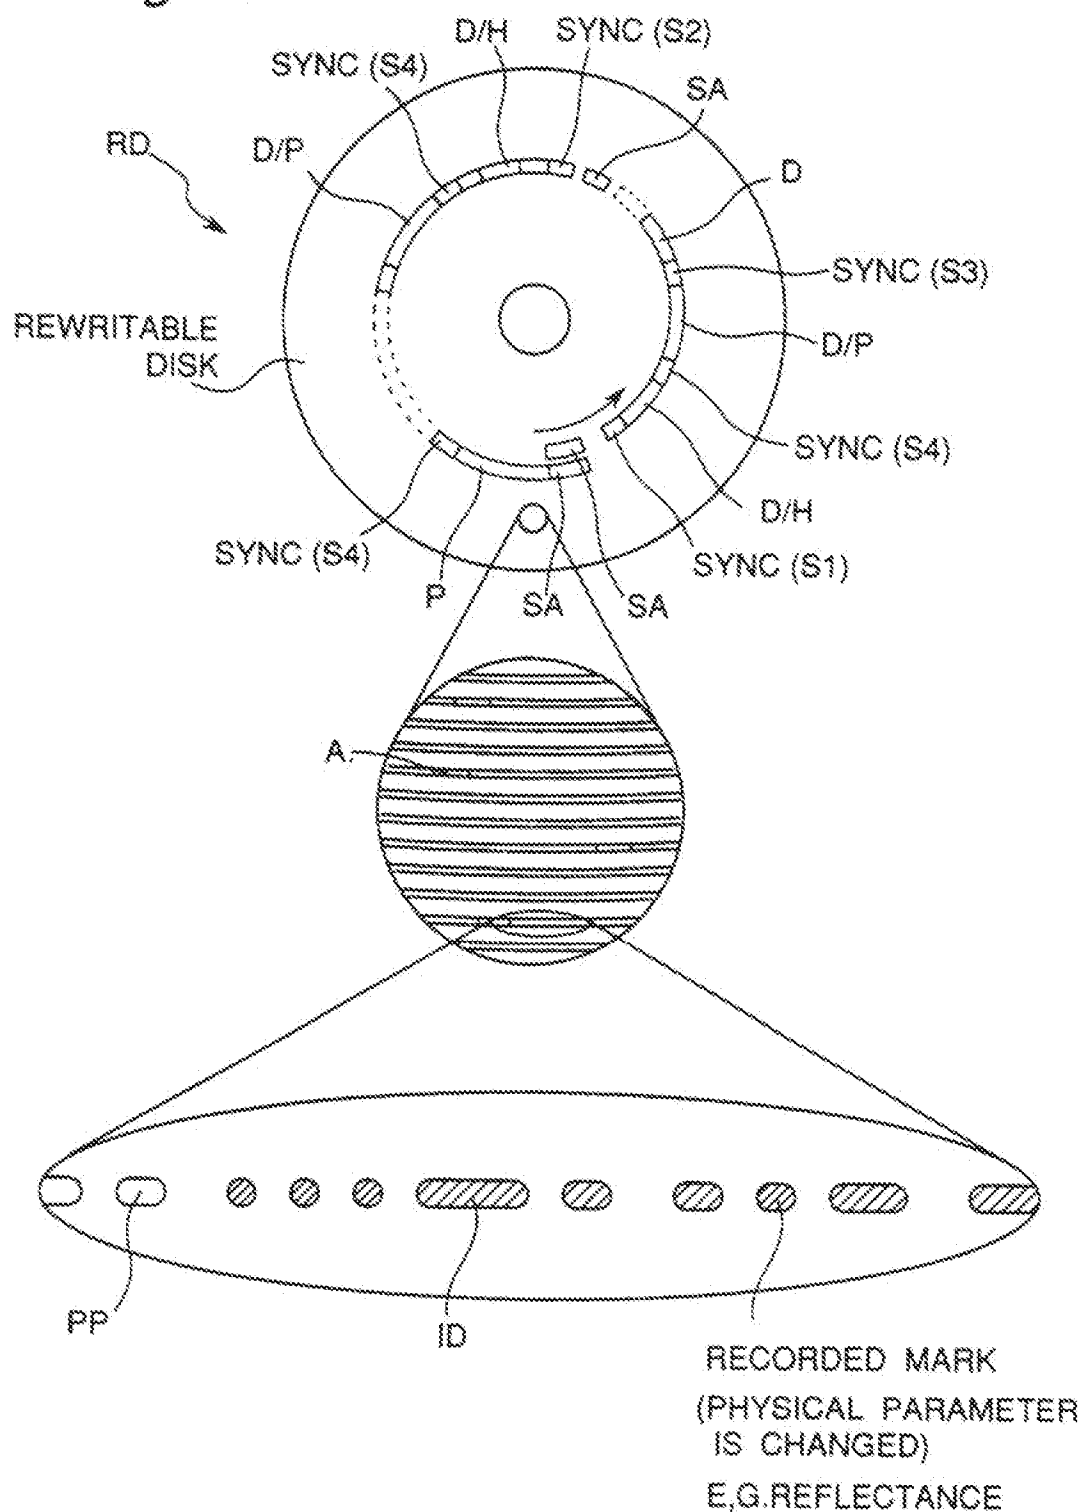



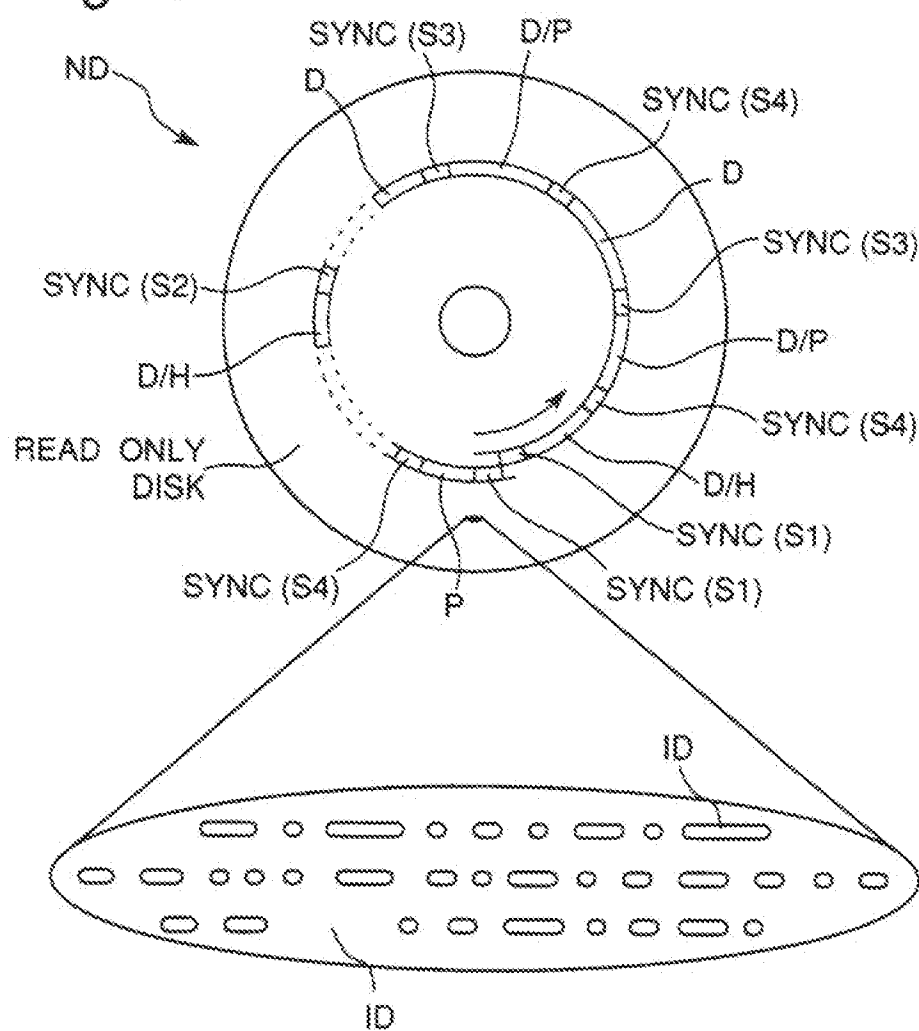
Fig. 19

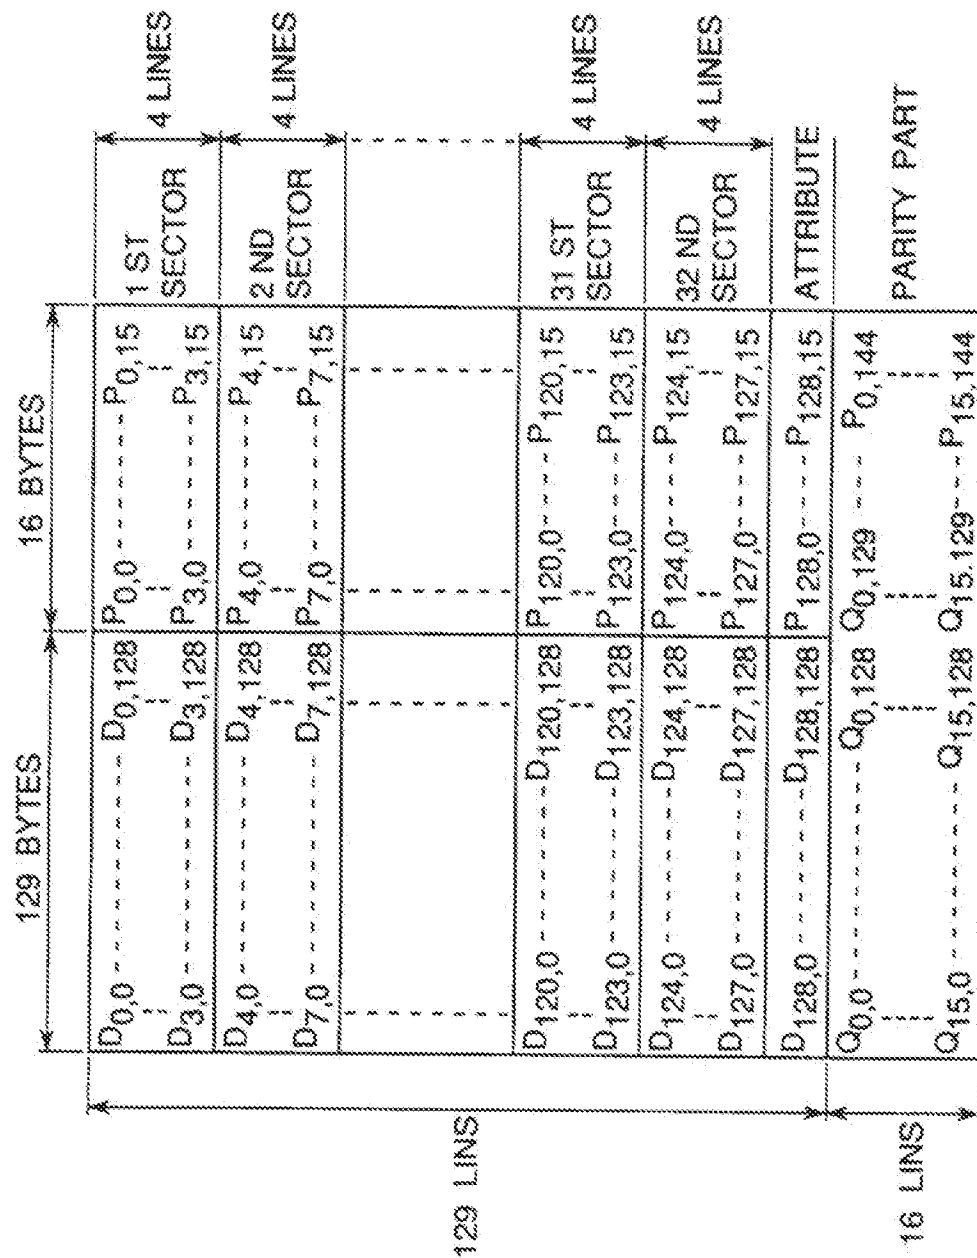Fig.20 PRIOR ART



INTERNATIONAL SEARCH REPORT

International Application No.

PCT/JP 96/00878

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G11B20/14 G11B27/30

According to International Patent Classification (IPC) or to both national classifications and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G11B H03M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A, P	EP, A, 0 673 029 (TOKYO SHIBAURA ELECTRIC CO ; TOSHIBA AVE KK (JP)) 20 September 1995 see abstract see column 2, line 14 - line 53 see column 5, line 15 - column 7, line 8 see column 8, line 27 - column 10, line 7 see claims 1-3; figures 1-3 ---	1-18
A	EP, A, 0 545 516 (CANON KK) 9 June 1993 see page 6, line 49 - page 8, line 4 see page 10, line 43 - page 13, line 1 see claim 1; figures 3, 4 --- -/-	1-9

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "A" document member of the same patent family

Date of the actual completion of the international search

12 August 1996

Date of mailing of the international search report

30-08-96

Name and mailing address of the ISA

European Patent Office, P.B. 3818 Patentkan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Schiwy-Rausch, G

INTERNATIONAL SEARCH REPORT

Inter- national Application No.
PCT/JP 96/00878

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP,A,0 415 853 (SONY CORP) 6 March 1991</p> <p>see column 1, line 56 - column 2, line 19 see column 5, line 23 - line 29 see column 7, line 45 - column 9, line 29 see column 16, line 24 - column 18, line 8 see column 20, line 57 - column 23, line 19 see figures 6-8</p> <p>---</p>	1,6,10, 17
A	<p>GB,A,2 061 575 (MATSUSHITA ELECTRIC IND CO LTD) 13 May 1981</p> <p>see abstract; figures 2,4 see page 2, line 84 - page 3, line 53 see page 4, line 37 - page 5, line 21</p> <p>---</p>	1,6,10, 14,17
A	<p>DE,A,43 04 267 (HITACHI LTD) 19 August 1993</p> <p>see abstract see page 2, line 40 - page 4, line 38 see page 6, line 18 - line 50 see page 9, line 42 - page 10, line 61 see figure 2</p> <p>---</p>	1,6,10, 14,17
A	<p>US,A,4 501 000 (IMMINK KORNELIS A ET AL) 19 February 1985</p> <p>-----</p>	

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/JP 96/00878

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0673029	20-09-95	JP-A- 7254239	03-10-95
EP-A-0545516	09-06-93	JP-A- 5159462	25-06-93
		US-A- 5541960	30-07-96
EP-A-0415853	06-03-91	JP-A- 3091167	16-04-91
		CA-A- 2024344	01-03-91
		US-A- 5192949	09-03-93
GB-A-2061575	13-05-81	JP-C- 1369704	25-03-87
		JP-A- 56124108	29-09-81
		JP-B- 61037688	25-08-86
		JP-C- 1695614	17-09-92
		JP-B- 3020831	20-03-91
		JP-A- 57006417	13-01-82
		JP-A- 56061072	26-05-81
		DE-A- 3040004	07-05-81
		US-A- 4375100	22-02-83
DE-A-4304267	19-08-93	JP-A- 5225709	03-09-93
		JP-A- 5225710	03-09-93
		US-A- 5333126	26-07-94
US-A-4501000	19-02-85	NONE	